

for a perfect finish at full speed

The versatile all-round product 1950 siaspeed is specially designed for high stock removal rates, perfect surface quality and long life in applications such as the surface treatment of body filler, primer filler, lacquers and paints.



Advantages

- Very high stock removal rates and excellent finish
- Performance-enhancing grit mix with ceramic corundum in 40 - 80 grit range
- Minimal clogging thanks to open coating in 220 - 600 grit range
- Extremely long lifetime
- Available with innovative FiboTec multi-hole air chamber backing / blue-fired
- Lower abrasive consumption
- Versatile all-round product with an attractive range of options

Applications


- Sanding off of coatings and impurities
- Sanding out of unevenness at the edges of repaired surfaces
- Flattening of body filler and primer filler
- Fine sanding of primer filler
- Keying of old and new varnishes

Product profile

Grit type:	Mixed grit with ceramic content	40 – 80
	Semi-friable aluminium oxide / blue-fired	P100 – P600
Backing:	Paper	
Coating:	Electrostatic	40 – P180
	Electrostatic open	P220 – P600
bonding:	resin over resin	
Coating:	Stearate	from 80

Properties



The following properties refer to the materials used in the main application:

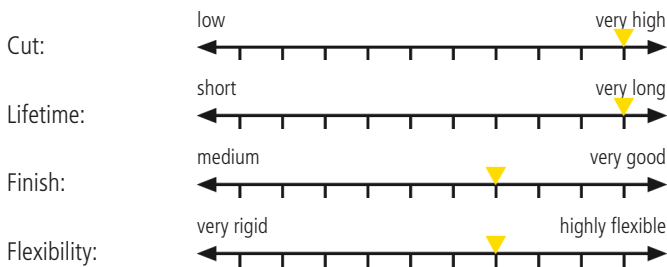

Materials

Colour; Primer filler; Body filler; Varnish; Old lacquer; Primer coat; Epoxy primer coat; Cathodic dip primer coat; Plastics; Acrylic glass (Plexiglass); Gelcoat polyester; Glass-fibre reinforced plastic (GRP)

Application

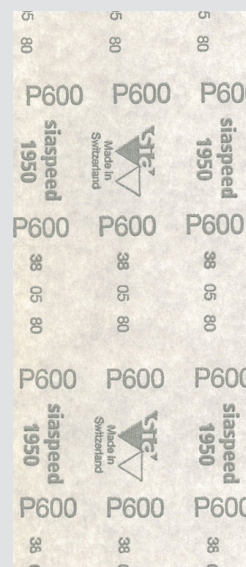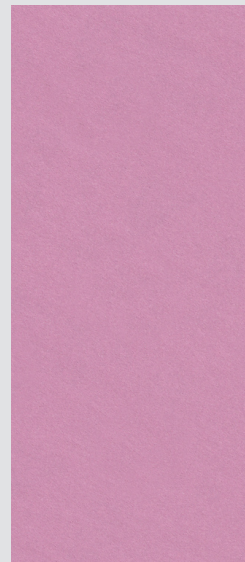

16				
20				
24				
30				
36				
40	■	■		
50				
60	■	■		
80	■	■		
100	■	■		
120	■	■		
150	■	■	■	
180	■	■	■	
220	■	■	■	
240	■	■	■	
280	■	■	■	
320	■	■	■	
360	■	■		
400	■	■	■	
500	■	■	■	
600	■	■	■	
800				
1000				
1200				
1500				
2000				
2500				
3000				
4000				

plain
sfast
ssoft
SKF