



UV Protection Oil

Contains biocides to prevent the growth of algae, mildew and mold as well as UV inhibitors to prevent greying. Microporous - will not crack, flake, peel or blister. Suitable for vertical surfaces only.




Approx Coverage
172 ft²/L (16m²/L) per coat

Approx Dry Time
12 hours

No. of Coats
2 coats

Available Sizes
5mL / 750mL / 2.5mL

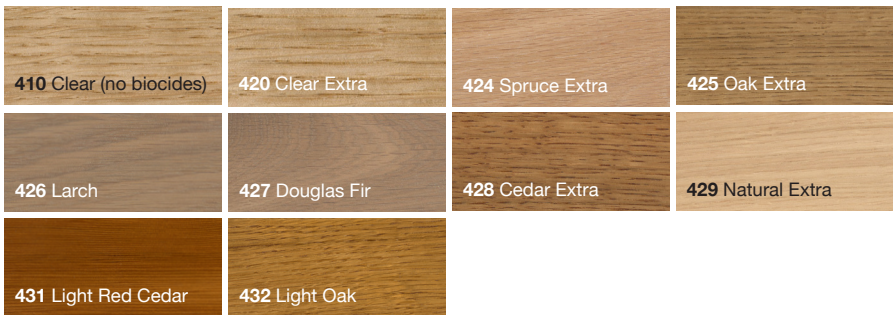

01

Based on renewable raw materials

02

12x UV-Protection. Rated according to EN 927-6

03

Dries within 12 hours, water resistant when cured

04

Microporous and breathable. Will not crack, flake, blister or peel

05

Can be easily maintained with no sanding required