

the first choice for first-class wet sanding results

As a leading wet use abrasive, the 1913 siawat aluminium oxide series has been producing outstanding results for years thanks to such outstanding properties as high stock removal rates, optimal water resistance, long life and flexibility.

Advantages

- Very high removal rate
- Extremely long lifetime
- Highly water resistant
- Highly adaptable to contours and shapes
- May be used wet or dry
- The market-leading wet abrasive for years



Applications


- Sanding off of coatings and impurities
- Sanding out of unevenness at the edges of repaired surfaces
- Flattening of body filler and primer filler
- Fine sanding of primer filler
- Keying of old and new varnishes
- Removal of paint runs, orange-peel effect and dust inclusions

Product profile

Grit type:	Semi-friable aluminium oxide	P060 – P1200
	Silicon carbide	P1500 – P2500
Backing:	c-wt paper	P800 – P2500
	d-wt paper	P060 – P600
Coating:	Closed	
bonding:	resin over resin	

Properties

The following properties refer to the materials used in the main application:

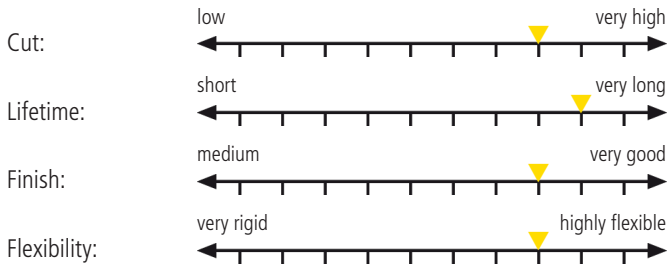

Materials

Colour; Primer filler; Primer coat; Epoxy primer coat; Old lacquer; Varnish; Body filler; Plastics

Application



16				
20				
24				
30				
36				
40				
50				
60	■			■
80	■			■
100	■			■
120	■			■
150	■			■
180	■	■		■
220	■	■		■
240	■	■		■
280	■			■
320	■	■		■
360	■			
400	■	■		■
500	■	■		■
600	■	■		■
800	■	■		■
1000	■	■		■
1200	■	■		■
1500	■	■		■
2000	■	■		■
2500	■	■		■
3000				
4000				

plain
siafast
siaSoft
SKF

Area
Coatings and Composites

Product line
Coated abrasives

