

TopTec

Top technology for perfect surfaces

Outstanding sanding results and superior surface quality come from the combination of controlled grit distribution, belt joints and backing materials designed to suit the specific application along with antistatic properties that arise from a brand-new production process.

Controlled grit coating



- Optimum grit volume
- Perfect grit adhesion
- Even grit distribution
- Tested to FEPA standards

Superior belt joints



- High and consistent quality
- Specific application orientation
- High-quality processing
- Excellent stability and long life
- No sanding flaws

Dust-free operation



- Dust-free workpieces
- Clean machinery
- Efficient dust removal
- Cleaner air in the working environment
- Longer belt life
- Low clogging

Joint types




Overlapped joint without grit sanding



Overlapped joint with grit sanding



Butted joint with special film on the grit side

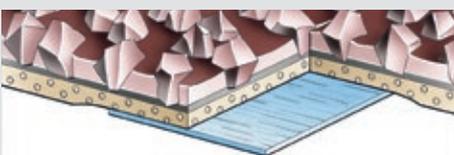

Butted joint with special film on the back

