for optimal performance on softwood
2920 siawood is ideal for manual sanding and belt sanding in plywood and softwood board production, and offers high stock removal rates, long life and excellent finish in coarse to fine sanding applications.

Advantages

- Perfect surface finishes thanks to TopTec
- Dust-free process: antistatic construction gives low dust formation on belt, workpiece and machinery
- Suitable for long periods of use thanks to very robust backing and optimised grit spreading technology
- High removal rate when working on softwood and hardwood with coarser grits

Applications

- Flush sanding of edges
- Coarse sanding in plywood manufacturing
- Intermediate sanding in plywood manufacturing
- Coarse sanding of laminated softwood panels
- Intermediate sanding of laminated softwood panels
- Fine sanding of laminated softwood panels
- Sanding and removal of paints and lacquers

Product profile

Grit type:	Semi-friable aluminium oxide	
Backing:	y-wt cloth, cotton	P016 – P050
	x-wt cloth, cotton	P060 – P320
Coating:	Electrostatic open	P016 – P120
	Closed	P150 – P320
bonding:	resin over resin	
Equipment:	TopTec	

Properties

The following properties refer to the materials used in the main application:

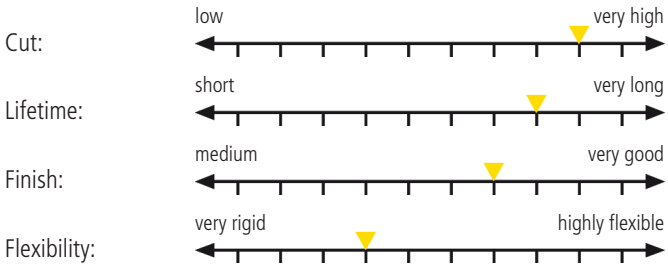

Materials

Soft wood; Hard wood; Resinous wood; Mineral material; Old lacquer; Old paint; Body filler; Primer filler; Plywood panel; MDF board; Chipboard

Application

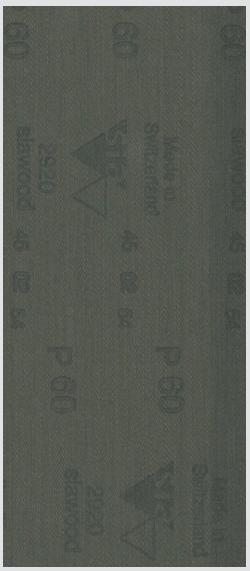

	plain	siafast	siasoft	SKF
16	■			
20				
24	■	■		■
30	■			
36	■	■		■
40	■	■		■
50	■	■		■
60	■	■		■
80	■	■		■
100	■	■		■
120	■	■		■
150	■	■		■
180	■	■		■
220	■			■
240	■			
280				
320	■			
360				
400				
500				
600				
800				
1000				
1200				
1500				
2000				
2500				
3000				
4000				

Area
Wood

Product line
Coated abrasives

20. July 2016 © sia Abrasives Industries AG – All rights reserved.