

for perfect finish on profiled workpieces with radii from 2–5 mm
 2951 siatur h excels in manual and portable machine sanding applications with radii from 2–5 mm thanks to its high adaptability and dimensional accuracy, especially in jobs such as keying, intermediate sanding and final sanding on paint, lacquer, body filler and primer filler.



Advantages

- Can be torn to any desired format
- Best adaptability in the siasoft version
- High level of dimensional accuracy during profile belt sanding
- Highly adaptable to contours and shapes
- Suitable for sanding brushes

Applications


- Final sanding of profiled workpieces
- Intermediate sanding of varnishes on curves and profiles
- Profile grinding for radii greater than 2 mm
- Keying of paints, lacquers, bodyfiller, primer filler and plastics
- Keying of paints and fillers on flat surfaces and profiles
- Keying of primers, primer fillers and bodyfillers

Product profile

Grit type: Semi-friable aluminium oxide
 Backing: h-wt cloth, cotton
 Coating: Closed
 bonding: resin over resin

Properties

The following properties refer to the materials used in the main application:

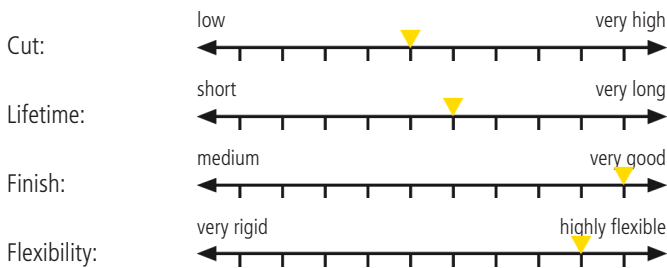

Materials

Soft wood; Hard wood; Resinous wood; Plywood panel; Polyester lacquer; PU lacquer; NC lacquer; UV lacquer; Water-based varnish; Acrylic varnish; Body filler; Primer filler; Primer coat; Mineral material; Plastics; Plaster; Plasterboard

Application



16				
20				
24				
30				
36				
40	■			
50				
60	■			■
80	■	■	■	
100	■	■		
120	■	■	■	
150	■	■	■	
180	■	■	■	
220	■	■	■	
240	■		■	
280	■	■	■	
320	■	■	■	
360				
400	■	■	■	
500				
600	■		■	
800				
1000				
1200				
1500				
2000				
2500				
3000				
4000				

plain
 siatast
 siasoft
 SKF

Area
 Wood

Product line
 Coated abrasives

