

Mirka[®] Canada Inc. PRODUCT CATALOG



The Pioneers of Dust-Free Solutions

For more than two decades, Mirka has been at the forefront of dust-free sanding. Our patented Net structure means that no dust particle is ever more than 0.5 mm from a dust extraction hole, so it is always possible to see exactly what is happening at the sanding surface.

About Mirka Canada

Welcome to Mirka! We are making a continuous effort to bring you the best abrasives, tools, dust-free sanding systems, and accessories. This way, when partnering with Mirka, you can evolve your work and your business.

The following pages will show our broad range of products, from the new and innovative to the tried and true.

At Mirka, when we say we are Dedicated to the finish, we mean the results achieved by our customers. This dedication over the years has made us a world leader in sanding solutions for surface finishing and precision industries. We deliver one of the most diverse portfolios in the industry and help tackle projects from the ordinary to the extraordinary, and anything in between!

Our customers have the advantage of:

- Exceptional Support through our passionate and knowledgeable team members
- Pioneering Innovations that deliver next-generation products and processes
- Unwavering Dedication that enables a remarkable finish and inspires technicians, shop owners, creators, woodworkers and DIYers to perform better

We welcome your feedback on how we can best help you achieve your goals, whether through new products, partnerships, or other ideas.

Thanks for your interest in Mirka.

Table of Contents:

Abralon [®]	8	Goldflex ProFlex	16
Abralon® J3	8	Goldflex Soft	14
Abranet	4	Gold Soft	14
Abranet Ace	4	Gold Film	16
Abranet Ace HD	4	Golden Finish	24
Abranet Max	. 26	Grinding Discs	30
Abrasive Sponges	. 22	Grit Comparison Chart	60
Accessories	. 53	Hand Sanding Tools	55
Autonet	4	Hiolit XO/ JCA2A0	20
Backup Pads	. 55	Hiolit XO Belts	28
Basecut	18	Interface Pads	58
Caratflex	18	Iridium	9
Coarse Cut	. 19	Iridium SR	9
Cordless Tools	45	Jepuflex Antistatic 20	, 28
DEROS + DEOS + DELTA	37	LEROS	38
Dust Extractors	. 51	Microstar	13
Dust Extractors Accessories	52	Mini File Belts	
Essentials	47	Mirlon Total	21
Galaxy	17	Mirlon	21
Gold	14	Mirka Authorized Logo Guidelines	61

Ν	1iscellaneous Accessories	59
Ν	IR-Series Pneumatic Tools	41
Ν	lovastar replaced by Micros	tar/Galaxy
0)SP	7
Po	olarstar replaced by Micros	tar/Galaxy
Po	olarstar SR	12
Po	olarshine	33
Po	olishing Pads	34
Pr	neumatic Belt Sanders	40
Pr	rotector Pads	58
PI	ROS CV / SGV / NV	39
Q). Silver	10
Si	ica Closed Belts	27
Si	ica Fine Stearate Belts	27
Su	urface Conditioning Belts	
T۱	wo-Handed Tools	43
U	Iltimax Belts	26
U	Iltimax Ligno	11
W	VPF Pro	19

Safety Warnings:



These symbols are found on all Mirka SOPs, as well as the product packaging for Mirka abrasives. Specific requirements for personal protective equipment (PPE) are presented in many different OSHA standards, published in 29 CFR.



and properly fits each worker exposed to the hazard. Use gloves specifically designed for the hazards and tasks found in

Wear appropriate eye and face protection and ensure that the selected form of protection is appropriate to the work being performed

the workplace. The nature of the hazard and the operation involved will affect the selection of gloves.

If engineering and work practice controls do not lower employee exposure to workplace noise to acceptable levels, employees must wear appropriate hearing protection.



Selecting the right respirator requires an assessment of all the workplace operations, processes or environments that may create a respiratory hazard.


Read and follow all instructions contained in Technical Data Sheets and User Manuals.

The User is responsible for determining whether the Mirka product is fit for a particular purpose and suitable for the User's application.

The User is also responsible for complying with any applicable safety and health-related regulations and for taking safety and healthrelated precautions when using Mirka products. This includes, but is not limited to: wearing safety glasses, face masks, gloves, and protective clothing, if necessary, following instructions and warning labels, and operating Mirka products safely including at safe operating speeds.

By User's purchase or use of Mirka products, User acknowledges, represents, and warrants that User will: (a) comply with the foregoing, (b) assume all risks in connection with the use of Mirka products, and (c) read and understand the Mirka Warranty Policy.

Symbols:

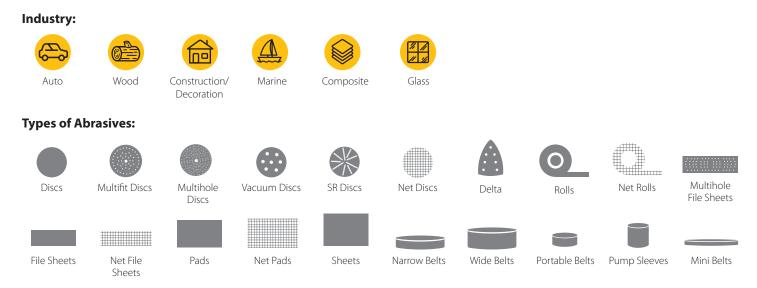

Product Number Reference Guide:

Product numbers are by series, configuration and grit. The last digits of the product number are the GRIT (XXX).

EX. 9A-203-XXX = 9A-203-800 represents Abranet[®], 3" disc, P800


23-5MF-XXX = 23-5MF-320 represents Gold, 5" Multifit vacuum disc, P320

FM-611-XXX = FM-611-2500 represents Microstar®, 6" vacuum disc, P2500

For part numbers without dashes - the last two digits XX are the GRITS EX. Polarstar, FA622050XX


80 = P80, 10 = P100, 12 = P120, 15 = P150, 18 = P180, 25 = P240, 32 = P320, 41 = P400, 51 = P500, 61 = P600,


81 = P800, 92 = P1000, 93 = P1200, 94 = P1500, 95 = 2000, 96 = 2500

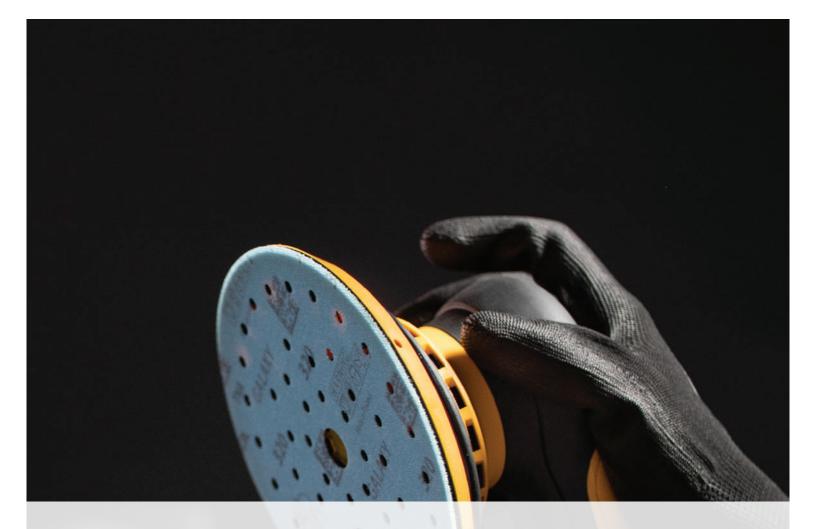



ABRASIVES

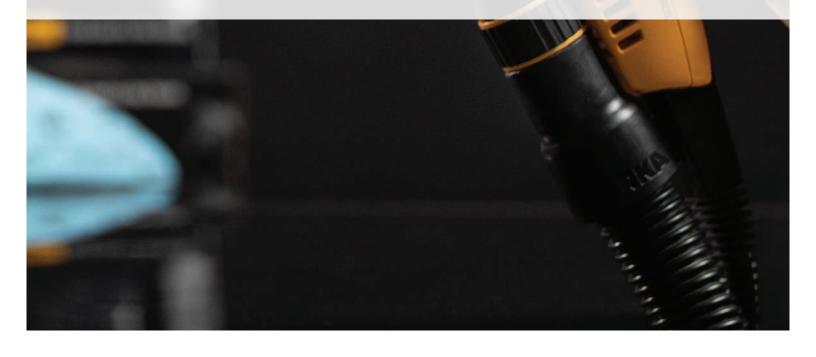




Grain	Aluminum oxide
Bonding	Resin over resin
Backing	Polyamide net
Coating	Closed
Color	Maroon
Attachment	Grip

FEATURES AND BENEFITS:

- Net abrasives are a key component for dust-free sanding
- Removal of dust particles eliminates loading and pilling problems
- Woven mesh backing works with hook and loop attachment
- Designed for dry sanding by machine or by hand
- Available in discs, sheets, and rolls

Abranet[®] Ace HD Net Abrasive AH Series



Grain	Ceramic
Bonding	Resin over resin
Backing	Polyamide net
Coating	Closed

Brown

Grip

FEATURES AND BENEFITS:

Color

Attachment

- Ceramic grains allow for maximum cutting speed and consistent performance across a variety of surfaces and substrates
- Coarse grit range makes this ideal for aggressive stock removal
- Features exceptional resistance to edge wear and clogging
- Net abrasives are a key component for dust-free sanding





Technical Specifications

Grain	Ceramic/Ceramic coated
Bonding	Resin over resin
Backing	Polyamide net
Coating	Closed
Color	Light Maroon
Attachment	Grip

FEATURES AND BENEFITS:

- Developed to achieve outstanding results on challenging surface conditioning and repair applications
- Well designed for metal applications
- Removal of dust particles eliminates loading and pilling problems
- Improved woven mesh backing offers increased strength and edge wear
- Net abrasives are a key component for dust-free sanding



Technical Specifications

Grain	Aluminum oxide
Bonding	Resin over resin
Backing	Polyamide net
Coating	Closed
Color	Gray
Attachment	Grip

FEATURES AND BENEFITS:

- Excellent initial aggressivity
- Long life-span compared to paper-backed discs
- Eliminates clogging and pilling
- Developed specifically for the automotive repair industry
- Rolls have perforations every 2³/₄" making it simple to get the desired length
- Net abrasives are a key component for dust-free sanding

Abrane	t [®]	Net Abrasi	ve															
	Part Number:	Size:	Description:	80	100	120) 15	01	80	220	240	320	400	500	600	800	1000	AP
٠	9A-600-XXX	1.3"	Grip	٠		٠	٠		•		•	٠	٠					
	9A-203-XXX	3"	Grip	•	٠	•	•		•	•	•	•	•		•			٠
	9A-232-XXX	5"	Grip	•	•	•	•		•	•	•	•	•	•	•	•	•	•
	9A-241-XXX	6"	Grip	•	٠	•	•		•	•	•	•	•		•	•	•	٠
	9A-252-XXX	8"	Grip	•		•			•		•	•	•		•	•		
	9A-223-XXX	9"	Grip	•	٠	•	•		•		•							
	9A-262-XXX	11"	Grip	•		•			•		•	•	•					
#	9A-219-XXX	4" x 6" x 6"	Grip	•		٠	•		•		•							
0	9A-570-XXX	2¾" x 10 yds.	Grip	•	٠	•			•		•	•	•					
	9A-149-XXX	2¾" x 5"	Grip	٠		٠	•		•	٠	•	٠	•		•			
	9A-150-XXX	2¾" x 7¾"	Grip	•		•	•		•	•	•	٠	•					٠
	9A-151-XXX	2¾" x 16½"	Grip	•	٠	•	•		•		•	•	•					
	9A-129-XXX	3" x 4"	Grip	•		•	•		•	•	•	•	•					
	9A-178-XXX	3" x 5"	Grip	٠	٠	٠	•		•		•	٠	•	٠	•			
Ô.	9A-110-XXX	41⁄2" x 10 yds.	Grip	•	٠	•			•		•	•	•					
	9A-125-XXX	41⁄2" x 25 yds.	Grip	٠		•			•		•	٠	•					
Ô.	9A-125-XXX	41⁄2" x 25 yds.	Grip	•		•			•		•	•	•					
0	9A-555-XXX	4.5" x 8.2'	Grip	٠		٠			•		٠							
Abrane	t® Ace	Net Abrasi	ve															
	Part Number:	Size:	Description:	40	60	80	100	120	150	0 18	0 220) 240	320	400	500	600	800	1000
	AC-129-XXX	3" x 4"	Grip			•		•	•	•		•	•	•		•		
	AC-178-XXX	3" x 5"	Grip			•	•	•	•	•		•	•	•				
•	AC-203-XXX	3"	Grip			•				•	•	•	٠	•	٠	•	٠	•
	AC-232-XXX	5"	Grip			•	•	•	•	•	•	•	•	•	•	•	•	•
	AC-241-XXX	6"	Grip			•	•	•	•	•	•	•	•	٠	•	•	•	•
	AC-223-XXX	9"	Grip			•	•	•	•	•	٠	٠	٠	٠	•	•	•	•
		N 1 1 1																
Abrane	et® Ace HD	Net Abrasi																
	Part Number:	Size:	Description:	40	60	80	100	120	15	0 18	0 22) 240	320	400	500	600	800	AP
•	AH-219-XXX	4 x 6 x 6"	Grip	٠	٠	•		٠										
	AH-232-XXX	5"	Grip	٠	•	•		٠										

Autone	et®	Net Abrasive	2						
0	AH-570-XXX	2¾" x 11 yds.	Grip	٠	٠	•			
	AH-223-XXX	9"	Grip	٠	•	•	•		
	AH-252-XXX	8"	Grip	•	•	•			
	AH-241-XXX	6"	Grip	٠	٠	•	•		

		Part Number:	Size:	Description:	40	60	80	100	120	150	180	220	240	320	400	500	600	800	1000
	•	AE-203-XXX	3"	Grip			٠		٠	٠	٠		٠	٠	٠		٠	٠	
		AE232050XXX	5"	Grip			٠		٠	٠	٠		٠	٠	٠	٠	٠	٠	
		AE241050XXX	6"	Grip			•		•	•	•		•	•	٠	٠	٠	•	
*		AE-570-XXX	2¾" x 11 yds.	Grip, Perf Roll			•		٠	٠	٠		٠	٠	٠		٠		

* Perforated every 2³/₄"

*

Optimized Surface Preparation System



Mirka's groundbreaking 'Optimized Surface Preparation' system maximizes performance at every stage of the vehicle repair process. Gathering the best ideas from Mirka's years of experience, we streamlined and perfected the entire process to bring you the optimal system.

Surface preparation has never been so simple, fast, and cost effective, with a premium quality result that is repeatable, time and time again!

FEATURES AND BENEFITS:

- Complete system for auto body repair applications
- Easy for all operators to use
- Combines three industry SOPs in one process
- Improved consistency and less re-work
- · Simple to standardize process across all facilities
- Less time required for the repair
- Improved shop environment
- · Less technician exposure to dust
- Reduced labor cost of clean-up and maintenance
- Rolls are perforated every 2¾"



Technical Specifications				
Grain	Blended			
Bonding	Resin			
Backing	Polyamide NET			
Coating	Closed			
Color	Brown, Gray, Yellow			
Attachment	Grip			

		Part Number:	Description:	Process Steps:	Improvements Made:
		OS-203-001	3" Grip	Paint removal, Body filler sanding	New ceramic grain for more
-		OS-241-001	6" Grip	Paint removal, Body filler sanding	aggressive cut
OSP		OS-150-001	2¾" x 7¾" Grip	Paint removal, Body filler sanding	• More robust Net backing for better
-	*	OS-570-001	2¾" x 11 yds. Grip, Perf Roll	Paint removal, Body filler sanding	edge durability
		OS-203-002	3" Grip	Body filler/glaze sanding	
2		OS-241-002	6" Grip	Body filler/glaze sanding	
OSP		OS-150-002	2¾" x 7¾" Grip	Body filler/glaze sanding	
	* 🕰	OS-570-002	2¾" x 11 yds. Grip, Perf Roll	Body filler/glaze sanding	
	•	OS-203-003	3" Grip	Primer prep	
m		OS-241-003	6" Grip	Primer prep	
OSP		OS-150-003	2¾" x 7¾" Grip	Primer prep	
	*	OS-570-003	2¾" x 11 yds. Grip, Perf Roll	Primer prep	
4		OS-127-004	4½" x 5" Grip	Primer finishing	
OSP /		OS-734-004	3" 6-Hole, Grip	Primer finishing	
0	0	OS-711-004	6" 15-Hole, Grip	Primer finishing	

* Perforated every 23/4"

Use OSP with Mirka[®] Dry Guide Coat to Ensure the Perfect Finish!



9193500111 (Black)



9193600111 (White)

Dry Guide Coat is a great tool to guide the operator through the sanding process and to achieve a perfect result.

With its excellent covering properties, the powder makes all imperfections and scratches visible. The unique applicator leaves an even powder coating, and its flexible edges make it easy to use even on contoured areas.

Abralon®	Foam Abrasive				
8A Series					
Technical Specifications					
Grain	Silicon carbide				
Bonding	Special Resin				

Bonding	Special Resin
Backing	Knitted fabric on foam
Coating	Special Abralon [®] method
Color	Gray
Attachment	Grip
Foam Density	33 kg/m ²
Foam Thickness	6.5 mm

FEATURES AND BENEFITS:

Foam Abrasive

- Combines benefits of abrasive cloth and non-woven products
- Constructed of fabric face, foam center and a grip backing
- Abrasive grains are bonded evenly to the fabric face

Abralon® J3 Foam Abrasive 8M Series 😂 😂 🏠 😂 🖽

Ta alar										
lechr	ical Specifications									
Grain	Silicon carbide									
Bonding	Special Resin									
Backing Knitted fabric on foam										
Coating	Special Abralon® method									
Color	Gray									
Attachment	Grip									
Foam Density	62 kg/m ²									
Foam Thickness	3 mm									

- · Can be used for dry or wet sanding
- Open cell design holds large amounts of water or solvent for lubrication and cooling

	Part Number:	Size:	Description:	180	220	240	360	400	500	600	800	1000	2000	3000	4000	AP
•	8A-600-XXX	11⁄4"	Grip				٠		٠			٠	٠		٠	
	8A-203-XXX	3"	Grip	٠			•		•			٠	•	•	•	•
	8A-232-XXX	5"	Grip	٠			٠		٠	•		٠	•	•		
	8A-240-XXX	6" (10/Pk)	Grip	•			•		•			•	•	•	•	
	8A-241-XXX	6"	Grip	٠			٠		٠			٠	•	•	•	٠
	8A-618-XXX	12"	Grip	•			•		•				•			
Abralo	n® J3 Foam	n Abrasive														
	Part Number:	Size:	Description:	180	220	240	360	400	500	600	800	1000	2000	3000	4000	AP

	Part Number:	Size:	Description:	180	220	240	360	400	500	600	800	1000	2000	3000	4000	AP
•	8M-203-XXX	3"	Grip									٠	٠	٠	٠	
•	8M-241-XXX	6"	Grip									٠	•	•	•	
	8M-223-XXX	9"	Grip				•		•			٠	•		•	

DID YOU KNOW?

Some common applications for Abralon® abrasives include:

- Pre-polishing clearcoats (1000-4000)
- Surface finishing of aluminum or stainless steel
- Finishing of solid surface counter tops
- Sanding of sealers and primers (180-500)
- Removing mold marks and flash from plastic parts
- Finishing glass surfaces



Abralon[®]

Iridium Pap	per Abrasive
24 Series	
00 AM	400 HRKK 490 BIBIDIUM 400
Techn	ical Specifications
Grain	Ceramic / Aluminum oxide
Bonding	Low VOC resin system
Backing	Latex C-paper
Coating	Semi-open
Color	Gray



Technical Specifications

Grain	Silicon Carbide
Bonding	Slurry
Backing	Film, 3 mil
Coating	Closed
Color	Green, Gray, Purple
Attachment	PSA

FEATURES AND BENEFITS:

Attachment

- Fast sanding and consistent scratch pattern saves you time and money
- Consistent quality and non-stick coating repels dust and provides a long life
- Effective multihole pattern delivers outstanding performance without clogging

Grip, PSA and Plain

• Premium paper backing offers remarkable flexibility and grain adhesion

FEATURES AND BENEFITS:

- Perfect size for denibbing
- Keeps repair as small as possible
- Efficient defect removal
- First step in undetectable
 repairs
- Consistent on topcoat as well
 as composites
- Smooth film backing
- Ideal for OEM fine finishing
- Easy peel-and-stick attachment

Iridium Paper Abrasive

*

	Part Number:	Size:	Description:	40	60	80	100	120	150	180	220	240	320	400	500	600	800	1000
	24-101-XXX	9" x 11"	Plain			٠		٠		٠		٠	٠					
	24-314-XXX	5"	PSA			•		•	٠	•	•	•	٠	٠		٠	•	•
	24-342-XXX	6"	PSA			•		٠	٠	٠	٠	٠	٠	٠		٠	٠	•
	24-35M-XXX	3" x 5"	54-Hole, Grip		٠	•		٠	٠	•		٠	٠	٠				
	24-38P-XXX	2¾" x 15¾"	Perf, Grip		٠	•		٠	٠	•		٠	٠	٠				
٢	24-3MH-XXX	3"	Multi-Hole, Grip			•		•	•	•	٠	٠	•	٠	٠	•		
0	24-570-XXX	2¾" x 11 yds	20-Hole, Grip, Perf Roll			•		٠	٠	•	٠	٠	٠	•		•		
0	24-573-XXX	41⁄2" x 10 yds	PSA, Roll			•		٠	٠	•	٠		٠	٠				
0	24-574-XXX	2¾" x 20 yds	PSA, Roll			•												
0	24-584-XXX	2¾" x 40 yds	PSA, Roll					٠	٠	٠	٠	٠	٠	٠				
•	24-5MH-XXX	5"	Multi-Hole, Grip	•	٠	•		٠	٠	•	٠	٠	٠	٠	٠	٠	•	٠
	24-5NH-XXX	5"	No-Hole, Grip	•	•	•	٠	•	٠	•	٠	٠	٠	٠		٠	•	•
	24-620-XXX	4" x 6" x 6"	7-Hole, Grip			•		•		•		٠						
	24-641-XXX	3" x 4"	36- Hole, Grip			•	•	•	•	•	•	•	•	•				
•	24-6MH-XXX	6"	Multi-Hole, Grip	•	•	•		٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	•
	24-6NH-XXX	6"	No-Hole, Grip	•	•	•		•	•	•	•	•	•	•	•	•	•	•
\bigcirc	24-8MH-XXX	8"	Multi-Hole, Grip	•		•		•	•	•	•	•	•	•	٠	•	•	
•	24-680-XXX	9"	24-Hole, Grip	•	•	•	•	•	•	•	•	•	•					
	24-9CU-XXX	9"	9-Hole, Grip Styro	•	•	•												

* Perforated every 2¾"

Iridium SR Film Abrasive

	Part Number:	Size:	Description:	240	320	400	500	600	800	1000	1200	1500	3μ	5μ	7μ
٠	24-220-XXX	0.87"	PSA										٠	٠	٠
	24-301-XXX	11⁄4"	PSA rosette										•	•	•
•	24-309-XXX	11⁄4"	PSA											٠	•
٠	24-340-XXX	11⁄4"	PSA										٠	٠	٠

Q.Silver®

Paper Abrasive

2A Series + 2B Series 🛛 😂 🙋 + 2C Series

Technical Specifications

Grain	Aluminum oxide
Bonding	Resin over resin
Backing	P80 - P150: D-paper P180 - P500: C-paper P600 - P1500: B-paper
Coating	Semi-open
Color	Blue
Attachment	Grip and PSA



FEATURES AND BENEFITS:

- Outstanding performance in automotive, hard wood, and composites
- Flexible, strong, latex paper backing
- High heat endurance
- Tight grain distribution provides a more consistent scratch pattern
- Extra hard grain material

	Part Number:	Size:	Description:	80	100	120	150	180	220	240	320	400	500	600	800	1000	1200	1500
	2B-332-XXX	5"	PSA	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠					
	2B-608-XXX	3"	Grip	٠		•	٠	•	•		•	•						
	2B-612-XXX	5"	Grip	٠		•	•	•	•	•	•	•	•					
	2B-342-XXX	6"	Linkroll, PSA	٠		•	•	•	•	•	•	•	•					
	2B-622-XXX	6"	Grip	٠		•	•	•	•	•	•	•	٠					
	2B-611-XXX	6"	15-Hole, Grip	٠	٠	•	•	•	•	•	•	•	•					
	2B-663-XXX	2¾" x 16½"	Grip	•				•	•									
0	2B-574-XXX	2¾" x 20 yds.	PSA	٠														
0	2B-584-XXX	2¾" x 40 yds.	PSA			•	•	•	•		•	•						
•	XS-2C-600-XXX	1.25″	Grip											•	٠	•	•	•
	2C-332-XXX	5″	PSA											•				
	2C-608-XXX	3″	Grip											•	٠	٠	٠	•
	2C-612-XXX	5″	Grip											•	٠	•	•	•
	2C-611-XXX	6″	15-Hole, Grip											٠	٠	٠	٠	•
	2C-622-XXX	6″	Grip											•	•	•	•	•
	2C-341-XXX	6″	PSA											٠	٠			

Q.Silver[®] Paper Abrasive

Ultimax[®] Ligno Paper

Paper Abrasive




Technical Specifications

Grain	Ceramic / Aluminum oxide
Bonding	Low VOC resin system
Backing	Latex paper, D-paper / C-paper
Coating	Semi-open
Color	Red
Attachment	Grip and PSA

FEATURES AND BENEFITS:

- Combining a fast cut with long life, thanks to especially good resistance to clogging when sanding substrates.
- Special latex impregnated paper to prevent edgewear and tearing when sanding edges.
- Optimal cutting performance with consistent results.
- The Multifit® hole pattern controls the dust, reducing heat during sanding.

Ultimax[®] Ligno Film Abrasive

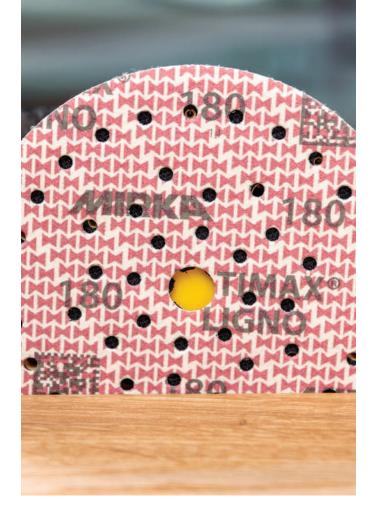

	Part Number:	Size:	Description:	40	60	80	100	120	150	180	220	240	320	400	500	600
0	UL-6MF-XXX	6"	Multifit, Grip	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠		
::::	UL-6B8-XXX	3" x 5"	Multifit, Grip	•	•	•	•	٠	٠	•	•	٠	•	٠		
::::	UL-6BK-XXX	3" x 4"	Multifit, Grip	٠	•	٠	•	٠	٠	٠	٠	٠	٠	٠		
0	UL-672-XXX	4.5" x 164'	Grip	•	٠	٠	•	٠	٠	٠	٠	٠	•	٠		
\bigcirc	UL-5MF-XXX	5"	Multifit, Grip	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠		
	UL-341-XXX	6"	PSA	•	•	•	•	٠	٠	•	•	٠	•	٠		
	UL-332-XXX	5"	PSA	٠	٠	٠	٠	٠	٠	٠	٠	٠	•	٠		
0	UL-127-XXX	4.5"x5"	Perf-Soft			•	•	•	•	٠	•	•	•	٠		




DID YOU KNOW?



Ligno's hourglass grain pattern segments the surface in a way that increases sanding pressure on each abrasive grain, while directing dust in the channels created in between. Its resistance to clogging prevents swirl marks in the working surface. In addition, each segments is constantly creating additional cutting edges during sanding.



Watch Ultimax[®] Ligno in action on out YouTube channel! an all-new Mirka abrasive for woodworking

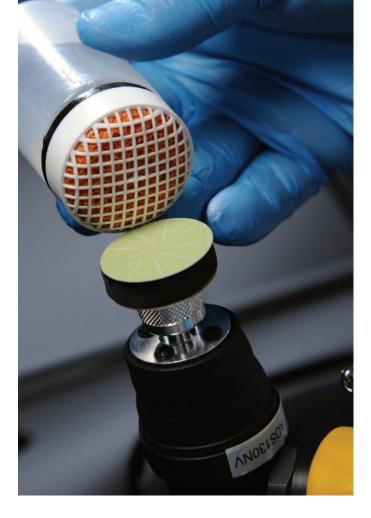

Polarstar® SR SR Series		3 micron (eqv. to P5000) 5 micron (eqv. to P3000) 7 micron (eqv. to P2500)
		B
3 micron	5 micron 7 m	nicron
Techni	ical Specificatio	ns
Grain	Aluminum oxide - SR3, S Silicon Carbide - SR5	R7
Bonding	Resin over resin	
Backing	Polyester film	
Coating	Defined mono-layer coa	ting technology
Color	Pale yellow (3A), Mint gro Lilac (7A)	een (5A),
Attachment	Water-resistant PSA	

FEATURES AND BENEFITS:

- Designed for spot repair of clearcoats
- Ideal for nib sanding to remove dirt or imperfections
- Excellent durability
- Suitable for wet sanding


Polars	tar [®] SR	Film Abrasiv	e													
	Part Num	ber: Siz	e: Do	escription:	240	320	400	500	600	800	1000	1200	1500	3μ	5μ	7μ
*	SR-301->	(XX 1½		PSA										٠	٠	٠
*	SR-340-)	(XX 1½	п	PSA											٠	٠

SR-301-XXX = Box of 100 SR-340-XXX = Box of 500

DID YOU KNOW?

The abrasive quality is important as every sanding step should make the following step easier. With a consistent scratch pattern, the sanded spot is far easier to polish out, making it impossible to see where the imperfection once was. Remove surface defects such as dust nibs in seconds with Mirka's system, saving both time and money.



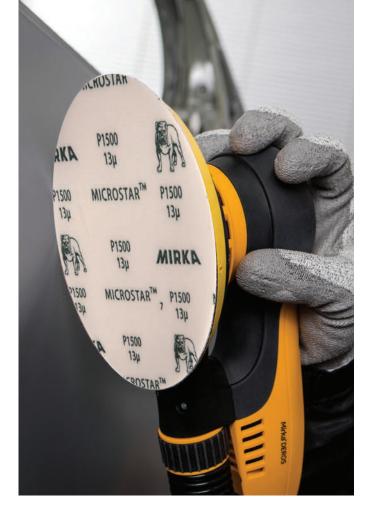

Microstar®	Film Abrasive	2
FM Series	S 🙆 🔔	
•		
	ACRUSIAN	
AKA	Ρ1500 13μ	AA
Р1500 13µ	MICROSTAR™	P1500 13µ
	P1500	
Techn	ical Specifi	ications
Grain	Aluminum oxide	5
Bonding	Low VOC resin s	ystem
Backing	Polyester film	
Coating	Semi-open	
Color	White	
Attachment	Grip	

FEATURES AND BENEFITS:

- Ideal for removal of runs, dust nibs and excess orange peel from topcoat finishes before repainting or buffing
- Resists loading for longer disc life
- Ideal for sanding fresh or soft clearcoat
- Leaves an even scratch pattern, which buffs out quickly on all types of automotive paints
- Film-backed discs have full resin bonded aluminum oxide grain


Microstar[®] Film Abrasive

	Part Number:	Size:	Description:	220	240	320	400	500	600	800	1000	1200	1500	2000	2500
	FM-608-XXX	3"	Grip							٠	٠	٠	٠	٠	
	FM-612-XXX	5"	Grip							•	•	•	•	•	•
	FM-622-XXX	6"	Grip							•	٠	•	•	٠	•
۲	FM-611-XXX	6"	15-Hole Grip							•	•	•	•	•	•

DID YOU KNOW?

Microstar abrasives are effective in both wet and dry sanding. For best results when sanding clearcoat and topcoat finishes, it is best to use an interface pad to prevent cutting through on the edges.

For longer life, wipe the Microstar disc with a microfiber cloth after making a few sanding passes.



23 Series

Technical Specifications

	inter operations
Grain	Aluminum oxide
Bonding	Resin over resin
Backing	P80 - P150 D-weight latex paper, P180 - P800 C-weight latex paper
Coating	Semi-open
Color	Gold
Attachment	Grip, PSA, and Plain

FEATURES AND BENEFITS:

- Designed for both finishing and heavy stock removal
- Aluminum oxide grain delivers a fast, long lasting cut
- High strength resin bonding provides superior grain support
- Special stearate coating is used to maximize resistance to clogging and loading
- Semi-open coat produces an even, consistent scratch pattern


Goldflex SoftPaper Abrasive23 SeriesImage: Constraint of the second s

Tech	Technical Specifications							
Grain	Aluminum oxide							
Bonding	Resin over resin							
Backing	A-latex paper with PE foam							
Coating	Semi-open							
Color	Gold							
Attachment	Plain							

FEATURES AND BENEFITS:

- Designed for hand sanding applications
- A-weight, latex impregnated paper backing with PE foam is highly flexible and ideal for profile sanding
- Produces a high quality finish
- Durable, aluminum oxide grain delivers a long lasting, smooth cut
- Bulk roll is perforated to allow easy sheet dispensing from box





FEATURES AND BENEFITS:

- Designed for final sanding of e-coats, primers, sealers and panel blends
- Durable, aluminum oxide grain delivers a long lasting, smooth cut
- A special stearate coating is used to resist clogging and loading
- 6" 15-hole discs can be used with or without vacuum

Gold Paper Abrasive

Multifit

	Part Number:	Size:	Description:	36	40	60	80	100	120	150	180	220	240	280	320	400	500	600	800	1000 1	200 15	00
	23-170-XXX	2¾" x 17½"	No-Hole, Plain	٠	٠	٠	٠	٠	٠	٠	٠	٠										
	23-314-XXX	5"	No-Hole, PSA, Linkroll				•	•	•	•	•	•	•		•	•	•	•	•			
۲	23-320-XXX	5"	8-Hole, PSA				•	٠	٠	٠		٠			٠							
۲	23-321-XXX	5"	5-Hole, PSA			•	•	٠	٠	٠	•	٠	•		•	٠						
	23-332-XXX	5"	No-Hole, PSA	٠	٠	•	٠	٠	٠	٠	•	٠	٠	•	•	٠	٠	•	•			
	23-341-XXX	6"	No-Hole, PSA	•	•	•	•											•	•			
	23-342-XXX	6"	No-Hole, PSA, Linkroll				•	٠	٠	٠	•	•	•	•	•	٠	٠					
	23-352-XXX	8"	No-Hole, PSA	•	٠		•	٠	٠	٠	٠	٠			٠	٠						
	23-364-XXX	2¾" x 16½"	No-Hole, PSA	٠	٠	•	٠		٠													
	23-379-XXX	6"	No-Hole, PSA, Autobox				•	٠	٠	٠	•	٠			٠	٠						
	23-388-XXX	5"	No-Hole, PSA, Autobox				•	٠	•	٠	•	٠	•		•	٠						
•	23-5MF-XXX	5"	Multifit, Grip		٠	•	•	٠	٠	٠	•	٠	•		•	٠	٠	•	•			
0	23-573-XXX	41⁄2" x 10 yds.	PSA, Autokut				•	٠	•	٠	•	•			•	٠						
0	23-574-XXX	2¾" x 20 yds.	PSA, Autokut				•	•														
0	23-584-XXX	2¾" x 40 yds.	PSA, Autokut						•	•	•	•	•		•	•		•				
	23-6MF-XXX	6"	Multifit, Grip		٠	•	•	•	•	•	•	•	•		•	•		•	•			
	23-608-XXX	3"	No-Hole, Grip				•		•	•	•	•	•		•	•	•	•	•			
	23-612-XXX	5"	No-Hole, Grip	•	٠	•	٠	•	٠	•	•	•	•		•	•	٠	•	•			
	23-622-XXX	6"	No-Hole, Grip	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
	23-631-XXX	8"	No-Hole, Grip	٠			•				•											
	23-632-XXX	8"	9-Hole, Grip								•				•							
۲	23-634-XXX	3"	6-Hole, Grip				٠		٠			٠	•		•	•		•	•			
::::	23-635-XXX	2¾" x 7¾"	8-Hole, Grip				•		٠	•	•	•			٠	٠						
	23-648-XXX	9"	27-Hole, Grip				٠	٠	٠	٠	•		٠									
	23-663-XXX	2¾" x 16½"	No-Hole, Grip	٠	٠		٠															
::::	23-688-XXX	3" x 5"	8-Hole, Grip				•	•	•	•	•	•	•		•							

Goldflex Soft Paper Abrasive

Part Number:	Size:	Description:	80	100 120	150	180	220	240 280	320	400	500	600	800	1000	1200	1500
23-145-XXX	4½" x 5"	Plain	٠	٠	٠	٠		•	٠	٠	٠	٠	٠	٠		

Gold Soft Paper Abrasive

	Part Number:	Size:	Description:	80 100 120 150 180 220	240 280 320	400 500	600 800	1000 1200 1500
۲	23-645-XXX	6"	15-Hole, Grip		٠	٠	•	

Gold ProFlex Paper Abrasive 23 Series

Gold FilmFilm Abrasive23 SeriesImage: Constraint of the series of the series



Tech	Technical Specifications							
Grain	Aluminum oxide							
Bonding	Resin over resin							
Backing	P80–P180 C-paper, P220–P800 B-paper							
Coating	Semi-open							
Color	Gold							
Attachment	Plain							

FEATURES AND BENEFITS:

- Designed for hand sanding applications
- Aluminum oxide grain provides a good cut and an excellent scratch pattern
- Flexible, latex-impregnated backing provides superior conformity in profile sanding
- Anti-slip coating on the back side provides a solid grip and feel during sanding

Technical Specifications

Grain	Aluminum oxide
Bonding	Low VOC resin system
Backing	Polyester Film
Coating	Semi-open
Color	White
Attachment	Grip and PSA

FEATURES AND BENEFITS:

- Designed for fine finishing
- Aluminum oxide grain delivers a fast and long lasting cut
- High strength resin bonding provides superior grain support
- Special stearate coating is used to maximize resistance to loading
- Semi-open coat produces an even, consistent scratch pattern

Gold Proflex Paper Abrasive

	Part Number:	Size:	Description:	80	100	120	150	180	220	240	280	320	400	500	600	800	1000	1200
	23-104-XXX	9" x 11"	Plain	٠	٠	٠	٠	٠	٠	٠		٠	٠	٠	٠	٠		
Gold Fil	m Film Ab	rasive	Multifit	Multi	fit hole	e patt	ern a\	vailabl	le in 5	", and	6" dise	CS.						
	Part Number:	Size:	Description:	12	0 150	180	220	240	280	320	400	500	600	800	1000	1200) 1500	2000
	23-3NHF-XXX	3"	No-Hole, Grip										٠		٠	٠	٠	٠
•	23-5MFF-XXX	5"	Multifit, Grip										•	•	•	•	•	•
	23-5NHF-XXX	5"	No-Hole, Grip										٠	٠	٠	٠	•	•
	23-5PF-XXX	5"	No-Hole, Linkroll, PSA											•	•	•	•	
	23-6NHF-XXX	6"	No-Hole, Grip										٠	•	٠	٠	•	•
	23-6MFF-XXX	6"	Multifit, Grip											•	•	•	•	•
	23-6PF-XXX	6"	No-Hole, Linkroll, PSA											٠	•	•	•	

DID YOU KNOW?

Mirka's abrasive product line is full of Gold! Great, reliable products that are continually updated to keep pace with today's technology – like the new Multifit line that fits any dust-free tool.

Here's a favorite:

Goldflex Soft is the perfect combination of a cut sheet and a sanding sponge. It sands the surface as flat as a sheet but also provides the flexibility to round contours like a sanding sponge. Excellent for softening the edges prior to top coat adhesion.






Technical Specifications

	•
Grain	Ceramic/Aluminum
Bonding	Low VOC resin system
Backing	Polyester film
Coating	Semi-open
Color	Blueish
Attachment	Grip and PSA

FEATURES AND BENEFITS:

- Self-Sharpening grains continue cutting from edge-to-edge
- New, sharp grains form as you sand
- Lasting sharpness means a long life and a fast cut
- Clog resistant coating repels dust to keep grains free to cut
- Scratch pattern of finer grits polishes out easily

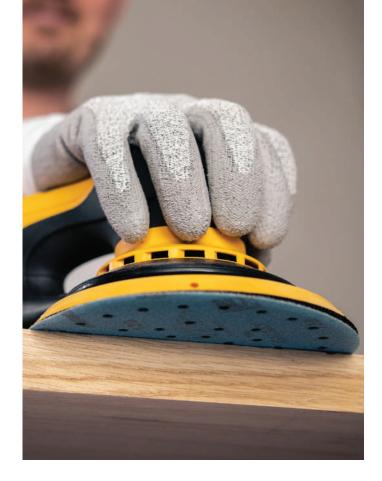

Galax	y Film Ab	rasive	Multifit	Multif	fit ho	ole p	patter	rn ava	ailable	e in 3	8", 5", a	and 6	" disc	cs.							
	Part Number:	Size:	Description:	40	60	80	100	120	150	180	220	240	320	400	500	600	800	1000	1200	1500	2000
	FY-608-XXX	3"	No-Hole, Grip	٠	•	٠	•	٠	٠	•	•	٠	٠	•	•	•	٠	٠	٠	٠	٠
	FY-612-XXX	5"	No-Hole, Grip	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	FY-622-XXX	6"	No-Hole, Grip	٠	•	•	٠	٠	٠	•	٠	٠	•	٠	٠	•	٠	٠	٠	٠	٠
	FY-3MF-XXX	3"	Multifit, Grip	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
٢	FY-5MF-XXX	5"	Multifit, Grip	٠	•	•	•	•	٠	•	•	•	•	٠	•	•	٠	•	٠	•	•
0	FY-6MF-XXX	6"	Multifit, Grip	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	FY-5PF-XXX	5"	No-Hole, Linkroll, PSA			•	•	•	•	•	•	•	•	٠	٠	٠	٠	•			
	FY-6PF-XXX	6"	No-Hole, Linkroll, PSA			•	•	•	•	•	•	•	•	•	•	•	•	•			
	FY-631-XXX	8"	No-Hole, Grip	٠	•	•	•	•	•	•	•	•	•	•							
	FY-680-XXX	9"	24-Hole, Grip			•		•		•	•	•	•	•	•						
0	FY-570-XXX	2¾" x 33½'	Multi-hole, Grip, Perf Ro	•	•	•	٠	٠	٠	•	٠	٠	•	٠							

No-hole versions: 5" Grip Disc, 5" PSA Link Roll, 6" Grip Disc, 6" PSA Link Roll * Perforated every 234"



DID YOU KNOW?

Multifit universal hole patterns provide optimal dust extraction, efficiency, and longevity with superb edge wear resistance. Multifit hole configurations are compatible with any dust-free tool on the market.

Available in Gold, Gold Film, Galaxy and Ligno.

Caratflex Paper Abrasive

02 Series



Ieci	inical specifications
Grain	Silicon carbide
Bonding	Resin over resin, Progressive Bond®
Backing	P80 - P320 B-paper, P400 A-paper
Coating	Semi-open
Color	Gray
Attachment	Grip, PSA and Plain

FEATURES AND BENEFITS:

- Designed for hand sanding of wood, sealers, paint and lacquers
- The latex impregnated paper backing is highly flexible and ideal for profile sanding
- An advanced stearate coating is used to resist loading
- Resin bonding improves grain adherence and product life
- Silicon carbide grain delivers an exceptionally sharp, smooth cut

BasecutPaper Abrasive20 Series😂 😂 🔔 😂



Technical Specifications

Grain	Aluminum oxide
Bonding	Resin over resin
Backing	P40-P80 D-paper, P100-P800 C-paper
Coating	Semi-open
Color	White
Attachment	Grip, PSA and Plain

FEATURES AND BENEFITS:

- Economical and efficient
- Dependable over a long lifespan
- Useful for a variety of applications
- High initial aggressive cut

Caratflex Paper Abrasive

Part Number:	Size:	Description:	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500
02-101-XXX	9" x 11"	Plain	٠	٠	٠	٠	٠	٠	٠		٠		٠						
02-314-XXX	5"	PSA, Linkroll		•	•	•	•	•			•								
02-612-XXX	5"	Grip					٠	•			٠								

Basecut Paper Abrasive

	Part Number:	Size:	Description:	40	60	80	100	120	150	180	220	240	320	360	400	500	600	800
	20-101-XXX	9" x 11"	No-Hole, Plain	٠	٠	٠	٠	٠	٠	٠	٠		٠		٠			
	20-314-XXX	5"	No-Hole, PSA			٠	٠	٠	•	•	•	٠	٠		٠	٠		
	20-332-XXX	5"	No-Hole, PSA with Liner														•	
	20-341-XXX	6"	No-Hole, PSA with Liner	•														
	20-342-XXX	6"	No-Hole, PSA			•	•	•	•	•	•		•		•	•		
	20-364-XXX	2¾" x 16½"	No-Hole, PSA	•		٠												
	20-352-XXX	8"	No-Hole, PSA with Liner	•		•												
0	20-573-XXX	41⁄2" x 30'	No-Hole, PSA			•	٠	٠	•	٠	•		٠					
0	20-580-XXX	2¾" x 75'	No-Hole, PSA			•		٠	•	•	•		٠		٠			
	20-612-XXX	5"	No-Hole, Grip	•		٠	•	٠	•	٠	•		٠		٠	٠	•	•
	20-622-XXX	6"	No-Hole, Grip	٠		•	•	٠	•	•	•		٠		٠	•	•	٠

WPF Pro

21 Series

Paper Abrasive

Technical Specifications

Grain	Silicon carbide P60–P3000
Bonding	Resin over resin
Backing	C-weight latex paper
Coating	Closed
Color	Black
Attachment	PSA and Plain

FEATURES AND BENEFITS:

- Waterproof paper offers full resin bonding on quality latex coated paper
- Ideal for nib sanding to remove dirt and imperfections from paint surfaces
- Consistent and precise manufacturing process provides fine scratch pattern for improved finish

Coarse Cut Paper Abrasive





Technical Specifications

Grain	Aluminum oxide
Bonding	Resin over resin, Progressive Bond®
Backing	Specially reinforced F-paper
Coating	Semi-open
Color	Maroon
Attachment	Grip and PSA

FEATURES AND BENEFITS:

- Coarse grades are aggressive and fast cutting as well as long lasting
- Specially reinforced paper exclusive to Mirka provides superior grain support
- Semi-open coat produces a consistent scratch pattern, while resisting loading

WPF Pro Paper Abrasive

Part Number: Size:	Attach:	60 80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
21-101-PXXX 9" x 11"	Plain	•	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠	٠
21-140-PXXX 5½" x 9"	Plain															٠	٠	٠	٠	٠	•

Note: 60 and 280 grits are new for $9'' \times 11''$ sheets 3000 grit is new for $5 \frac{1}{2}'' \times 9''$ sheets.

21-300 and 21-800 have been replaced by Iridium SR.

Coarse Cut Paper Abrasive

Part Number:	Size:	Description:	36	40	60	80	100	120	150	180	220	240	280	320	400	500	600	800
40-608-XXX	3"	Grip		•		٠												
40-612-XXX	5"	Grip	٠	•	•	•	•	•										
40-332-XXX	5"	PSA	٠	•	•	٠	٠	٠										
40-614-XXX	5"	5-Hole, Grip		•	•	٠		٠	٠									
40-622-XXX	6"	Grip	٠	•	•	٠		٠										
40-341-XXX	6"	PSA	٠	•	•	٠		٠										
40-624-XXX	6"	6-Hole, Grip	٠	•	•	٠												
40-631-XXX	8"	Grip	٠	•	•	•	٠											
40-352-XXX	8"	PSA	٠	•	•	•	٠	٠	•									
40-632-XXX	8"	9-Hole, Grip		•		٠			•									
40-663-XXX	2¾" x 16½"	Grip	٠	•		•												
40-364-XXX	2¾" x 16½"	PSA	•	٠	٠	٠	٠		٠									

Jepuflex Antistatic

Paper Abrasive

44 Series



Technical Specifications

Grain	Aluminum/Silicon carbide
Bonding	Resin over resin
Backing	Antistatic T-paper/F-paper
Coating	Closed
Color	Maroon
Attachment	Grip

FEATURES AND BENEFITS:

- Strong, reliable, antistatic paper
- Full resin bonding and aluminum oxide grain guarantee durability
- Silicon carbide grain used in the coarsest grit
- Perfect for sanding of hard wood such as beech, birch, and oak
- Multi-purpose works well on metal, plastic, and top coat

Hiolit[®] XO / JCA2A0 Paper Abrasive

XO (51) / JCA2A0 (5B)





Tech	Technical Specifications													
Grain	Aluminum oxide													
Bonding	Resin over resin													
Backing	Polyester cloth (51 Series) J-weight cotton cloth (5B Series)													
Coating	Closed													
Color	Maroon													
Attachment	PSA													

FEATURES AND BENEFITS:

- JCA2A0 option is highly adaptable to contoured surfaces
- Removes stock quickly, while producing a high-quality surface finish
- The durable aluminum oxide grain delivers an exceptionally long lasting cut

Jepuflex Antistatic Paper Abrasive

	Part Number:	Size:	Description:	40	50	60	80	100	120	150	180	220	240	320	360	400	500
0	44-325-XXX	3" x 75'	Grip	٠		٠	٠	٠	٠	٠	٠	٠					
0	44-625-XXX	6" x 75'	Grip	•		•	•	•	•	•	•	•					

Hiolit[®] XO / JCA2A0 Paper Abrasive

	Part Number:	Size:	Description:	40	50	60	80	100	120	150	180	220	240	320	360	400	500
•	51-332-XXX	5"	PSA	٠													
	5B-332-XXX	5"	PSA			٠	٠	٠	٠	٠	•	•	•	•		•	



Technical Specifications

Grain	Aluminum oxide (VF), Silicon carbide (XF, UF, MF)
Bonding	Resin
Backing	Non-Woven
Coating	Three Dimensional Total Coating
Color	Red (VF), Black (XF), Gray (UF), Gold (MF)

FEATURES AND BENEFITS:

- Open design is thinner and more flexible than traditional non-woven pads
- Three-dimensional structure made with cut fiber strands coated
 with resin and abrasive
- Consistent coating of aluminum oxide (VF 360) and silicon carbide (XF 800, UF 1500, MF 2500) abrasive grains provide uniform, dense scratch pattern
- Very flexible, ideal for use on contoured surfaces





Technical Specifications

Grain	Aluminum oxide (VF), Silicon carbide (UF)
Bonding	Resin
Backing	Non-Woven
Coating	Three dimensional
Color	Maroon (VF), Gray (UF)

FEATURES AND BENEFITS:

- Three-dimensional structure made with cut fiber strands coated
 with resin and abrasive
- Consistent coating of aluminum oxide (VF) and silicon carbide (UF) abrasive grains provide more uniform scratch pattern
- Very flexible, ideal for use on contoured surfaces

Mirlon Total[®] Non-Woven Abrasive

	Part Number:	Size:	Coating:	Color:	360	800	1500	2500
	18-118-446	4½" x 9"	XF	Black		٠		
	18-118-447	4½" x 9"	VF	Red	٠			
	18-118-448	4½" x 9"	UF	Gray			•	
	18-118-449	4½" x 9"	SF	Gold				•
	18-241-XXX	6"	VF (360) Red,	XF (800) Black	•	•		
0	18-573-373	41⁄2" x 11 yds.	VF	Red	•			
0	18-573-813	41⁄2" x 11 yds.	XF	Black		•		
0	18-573-943	41⁄2" x 11 yds.	UF	Gray			•	

Mirlon[®] Non-Woven Abrasive

	Part Number:	Size:	Coating:	Color:	360	800	1500	2500
	18-241-447	6"	VF	Maroon	٠			
	18-241-448	6"	UF	Gray			•	
	18-111-447	6" x 9"	VF	Maroon	•			
	18-111-448	6" x 9"	UF	Gray			•	
0	18-573-447	41⁄2" x 11 yds.	VF	Maroon	•			
0	18-573-448	41⁄2" x 11 yds.	UF	Gray			•	

Abrasive Sponges Foam Abrasive 1351 Series 🛛 😂 😂 1353 Series 🏽 😂 😂 🔂 🤔 **Technical Specifications** Grain Silicon carbide Grain Synthetic adhesive Bonding Bonding Backing Colored polyurethane foam Backing 24 kgm⁻³ Density Density **Tear Strength** 125 Nm⁻¹ **Tensile Strength** 87 kPa **Tensile Strength**

1355 Series 🛛 😂 🚵

Grain Bonding

Backing

Density

Tear Strength

Tensile Strength

3

Technical Specifications Aluminum oxide

24 kgm⁻³

125 Nm⁻¹

87 kPa

Synthetic adhesive

Colored polyurethane foam

MIRKA

Technical Specifications Aluminum oxide Synthetic adhesive Colored polyurethane foam 24 kgm⁻³ **Tear Strength** 125 Nm⁻¹ 87 kPa

1356 Series 😂 😂 🔂

100	150	180
220	280	320

Technical Specifications

Grain	Aluminum oxide
Bonding	Synthetic adhesive
Backing	Colored polyurethane foam
Density	24 kgm ⁻³
Tear Strength	125 Nm ⁻¹
Tensile Strength	87 kPa

Part Number:	Packaging:	Size:	Color:	Description:	60	80	100	120	150	180	220	280	320	400	600
1351-XXX	10/Box	4.75" x 3.75" x .5"	Black	2-sided			٠	٠	٠	٠	٠		٠	٠	
1351-XXXB	100/Box	4.75" x 3.75" x .5"	Black	2-sided			٠		•	٠	•			•	

Part Number:	Packaging:	Size:	Color:	Description:	60 8	0 100	120	150	180	220	280	320	400	600
1353-XXX	10/Box	4" x 2.75" x 1"	Brown	4-sided	•	٠		٠	٠	•				
1353-XXXB	100/Box	4" x 2.75" x 1"	Brown	4-sided		٠		•	•	•				

Part Number:	Packaging:	Size:	Color:	Description:	60	80	100	120	150	180	220	280	320	400	600
1355-XXX	20/Box	4.5" x 5.5" x .1875"	White	1-sided	٠		٠		٠	٠	٠		٠	٠	
1355-XXXB	250/Box	4.5" x 5.5" x .1875"	White	1-sided	•		٠	•	•	•	٠		٠	٠	

Part Number:	Packaging:	Size:	Description:	100 Purple	150 Blue	180 Red	220 Green	280 Clear	320 Brown
1356-XXXB	250/Box	4" x 5" x .5"	2-sided	٠	•	•	•	٠	٠

Abrasive Sponges Foam Abrasive MGS34 Series 🛛 😂 œ तिने 100 150 180 220 320 280 **Technical Specifications** Aluminum oxide Grain Backing Colored polyurethane foam Density 24 kgm⁻³

125 Nm⁻¹

87 kPa

Grip

Tear Strength

Attachment

Tensile Strength

MGS3410 Serie	es 🕞 😂	🖆 🔂 😂
100	150	180
220	280	320
Technic	al Specifi	cations
Grain	Aluminum oxi	de
Backing	Colored polyu	rethane foam
Density	85 kgm ⁻³	
Tear Strength	370 Nm ⁻¹	
Tensile Strength	290 kPa	
Attachment	Grip	



Grain	Aluminum oxide
Backing	Colored polyurethane foam
Density	85 kgm ⁻³
Tear Strength	370 Nm ⁻¹
Tensile Strength	290 kPa
Attachment	Grip



Part Number:	Packaging:	Size:	Description:	36 Clear	60 Clear	80 Clear	100 Purple	150 Blue	180 Red	220 Green	280 Clear	320 Brown
MGS34-XXXB	100/Box	3" x 4" x .5"	1-Sided, Grip		٠	٠	٠	•	٠	٠	٠	٠
MGS3410-XXXB	100/Box	3" x 4" x .4"	1-Sided, Grip, High Density	•	٠	٠	٠	•	•	٠	٠	•
MGS345-XXXB	100/Box	3" x 4" x .2"	1-Sided, Grip, High Density	•	•	•	•	•	•	•	•	•



DID YOU KNOW?

Let the sander do the work with 3" x 4" sponges that fit power tools using grip attachment. These versatile sponges can be used by hand or machine to upgrade results anywhere hand sanding had previously been needed.



Golden Finish Sanding System



The Mirka Golden Finish kit is a quick and easy solution for perfecting paint finishes.

It features number and color coded products for an efficient polishing process, suitable for both light and dark surfaces.

FEATURES AND BENEFITS:

- Complete Post-Paint Finishing System
- Improved consistency and less re-work
- Less time required for the repair area
- Systematic approach with numeric codes
- Two step sanding system / Two step polishing system
- Standardized post-paint / polishing process
- Ideal for both small and large repairs
- Grip attachment

 Part Number:	Description:	Process Steps:
OS-241-GF1	6" Grip (Film)	Step 1: Sanding/Leveling surfaces
OS-241-GF2	6" Grip (Foam)	Step 2: Sanding/Conditioning scratches
PC20-1L MPADLWY-6	Polarshine® 20 6" Lambswool Pad	Step 1: Polishing
FC5-1L MPADBF-6W	Polarshine® VF5 6" Black Foam Pad	Step 2: Polishing
M-9915G	Microfiber Cloth	Finish/Clean surface

STEP 1



20 Polarshine

OS-241-GF1 Golden Finish Step 1 6" Grip Film





MPADLWY-6 6" Lambswool Pad



OS-241-GF2 FC5-1L Golden Finish Step 2 Polarshine® VF5 6"Grip Foam



STEP 2

MPADBF-6W

6" Black Foam Pad



M-9915G Microfiber Cloth






ABRASIVE BELTS



Abranet[®] Max

AB Series



Technical Specifications Grain Aluminum Oxide Bonding Resin over Resin Backing Net Coating Closed

Brown

T (Standard)

FEATURES AND BENEFITS:

Color

Joint

- Tough aluminum oxide grain gives a high cut rate on harder wood types
 and materials
- Extremely long lifetime compared to conventional abrasive belts
- The symmetric net structure enables an efficient cut and stock removal
- Resists clogging on resinous wood types or soft materials
- Keeps sanded surface cooler to avoid burning
- Lower pressure required when sanding due to its net structure

Ultimax





Techr	Technical Specifications											
Grain	Aluminum Oxide											
Bonding	Resin over Resin											
Backing	Antistatic T-paper/F-paper											
Coating	Closed with Selective Coating™											
Color	Brown											
Joint	B -Joint											

FEATURES AND BENEFITS:

- Selective Coating® Technology prevents clogging
- Aggressive performance with cool sanding surface
- Long life and excellent edge wear resistance
- Reduced material usage per job

Abranet® Max

 Part Number:	Size:	Туре:	Custom Order?	40	50	80	100	120	150	180	220	240	320
AB-2.5-14-XXXT	2.5 x 14"	Portable	—			٠	٠	٠	٠	٠			
AB-3-18-XXXT	3 x 18"	Portable	—			٠	٠	٠	٠	٠			
AB-3-21-XXXT	3 x 21"	Portable	_			•	٠	٠	٠	•			
AB-3-24-XXXT	3 x 24"	Portable	_			٠	•	٠	•	•			
AB-4-24-XXXT	4 x 24"	Portable	—			•	•	•	•	•			
B-WIDTH-LENGTH-GRIT	W: 2" - 11.8" L: Variable	Narrow	Yes			٠	٠	٠	٠	٠			

Ultimax

Part Number:	Size:	Туре:	Custom Order?	40	50	80	100	120	150	180	220	240	320
UC-WIDTH-LENGTH-GRIT	W: 13-56" L: Variable	Wide	Yes			•	٠	٠	٠	٠	٠	٠	•

Sica Closed

04 Series



Technical Specifications

Grain	Silicon Carbide
Bonding	Resin over Resin / Antistatic
Backing	Antistatic F-Paper
Coating	Closed
Color	Black
Joint	TS (Standard)

Sica Fine Stearate





Techr	nical Specifications
Grain	Silicon Carbide
Bonding	Stearate-coated resin over resin/Antistatic
Backing	Antistatic E-Paper
Coating	Semi-open
Color	Grey
Joint	A (Lap joint)

FEATURES AND BENEFITS:

- The antistatic treatment reduces dust loading to keep machines
 and work piece cleaner
- Fine scratch pattern produces a good final result after surface treatment
- Designed for sanding of hardwood and MDF
- Well suited to use after Jepuflex to achieve a better finish

FEATURES AND BENEFITS:

- Full stearate coating for minimal dust load
- Can reduce topcoat use
- Variety of belt styles
- Available as Sica without stearate

Sica

Part Number:	Size:	Туре:	Custom Order?	36	40	50	60	80	100	120	150	180	220	240
04-WIDTH-LENGTH-GRIT	W: 13-56" L: 48-120"	Wide	Yes					•	٠	٠	٠	٠	•	

*Contact your local rep for availability and pricing.

Sica Fine Stearate

Part Number:	Size:	Туре:	Custom Order?	60	80	100	120	150	180	220	240	320	400
05-WIDTH-LENGTH-GRIT	W: 13-56" L: 48-120"	Wide	Yes								•	٠	•

*Contact your local rep for availability and pricing.



DID YOU KNOW?

Mirka's belt abrasives are the perfect companion to your belt sanding machines. They stand up to your toughest production sanding applications. The large sanding area gets the job done fast whether it's hardwood, metal, or plastic.

- Standard and Custom Lengths
- Cloth and Paper
- Anti-Static Option

Jepuflex Antistatic

44 Series 🛛 😂



Technical Specifications

Grain	Aluminum Oxide / Silicon carbide
Bonding	Resin over Resin
Backing	Antistatic T-Paper / F-Paper
Coating	Closed
Color	Maroon
Joint	TS (Standard)


FEATURES AND BENEFITS:

- Strong, reliable, antistatic paper
- Full resin bonding and aluminum oxide grain guarantee durability
- Silicon carbide grain used in the coarsest grit
- Perfect for sanding of hard wood such as beech, birch, and oak
- Multi-purpose works well on metal, plastic, and lacquer

Jepuflex Antistatic

Part Number:	Size:	Type:	Custom Order?	40	60	80	100	120	150	180	220	240	320	400
44-WIDTH-LENGTH-GRIT	W: 13-56" L: 48-120"	Wide	Yes			٠	٠	٠	٠	٠	٠	٠	٠	•







Technical Specifications Grain Blue fired Aluminum Oxide Bonding Resin over Resin Backing Polyester cloth: P36-P80 X-weight cotton cloth: P100-P220 Coating Semi-open Color Maroon Joint T /TS (Standard)

FEATURES AND BENEFITS:

- Excellent wear resistance and durability
- Designed for sanding operations where large amounts of material need to be removed
- Suitable for aggressive sanding
- Produces high quality results on challenging materials

Part Number:	Size:	Type:	Custom Order?	36	40	50	60	80	100	120	150	180	220	240
57-2.5-14-XXXT	2.5x14	Portable	Yes				•	٠	٠	٠	٠	٠		
57-3-18-XXXT	3x18	Portable	Yes		•		•	•						
57-3-21-XXXT	3x21	Portable	Yes		٠	٠	٠	٠	٠	٠	٠			
57-3-24-XXXT	3x24	Portable	Yes		٠	٠	٠	•	٠	•	•			
57-4-24-XXXT	4x24	Portable	Yes		•	•	•	•	•	•	•			
57-WIDTH-LENGTH-GRIT	W: 1-12" L: Variable	Narrow	Yes	٠	•	٠	٠	٠	٠	•	•	٠	٠	
57-WIDTH-LENGTH-GRIT	W: 13-56" L: Variable	Wide	Yes	٠	•	•	•	•	٠	٠	٠	٠	٠	

Hiolit[®] XO

Mini Belts

-XXX



lech	lechnical Specifications					
Grain	Ceramic blend					
Bonding	Resin over resin					
Backing	Y Polyester					
Coating	Semi-open					
Color	Red					

FEATURES AND BENEFITS:

- Improved ceramic blended self-sharpening grains
- Designed for high alloy steel and super alloys
- Subtle breakdown of ceramic grain produces much sharper edges
 which allows for lower temperature contact area and extended life
- Optimum stock removal

Surface Conditioning Belts

-CG and -MM



Technical Specifications					
Grain	Aluminum oxide				
Bonding	Resin over resin				
Backing	Scrim, spun nylon fiber				
Coating	Closed				
Color	CG: Gold, MM: Maroon				

FEATURES AND BENEFITS:

- Robust aluminum oxide grains
- Strong, durable nylon backing
- Optimum stock removal

	Part Number:	Size:	Description:	36	50	60	80	100	COARSE	MEDIUM
\bigcirc	66-1218-XXX	.5" x 18"	Mini Belt, 10/Box	٠	٠	٠	٠			
0	66-3813-XXX	.375" x 13"	Mini Belt, 10/Box	•	•	•	٠			
\bigcirc	66-1218-CG	.5" x 18"	Coarse Surface Finishing Belt, 10/Box						•	
\bigcirc	66-1218-MM	.5" x 18"	Medium Surface Finishing Belt, 10/Box							•
0	66-3813-CG	.375" x 13"	Coarse Surface Finishing Belt, 10/Box						•	
0	66-3813-MM	.375" x 13"	Medium Surface Finishing Belt, 10/Box							•

DID YOU KNOW?

Pair Mirka's Mini Belts with the PBS-13457 or PBS-10330 Pneumatic Belt Sanders. The rubber coated roller at the end of the tool not only aids with contour finishing but also enhances the life of the mini belts.

The control of sanding speed is also a big factor when using Mirka's mini belts. Running the tool at a lower speed actually gets the job done faster and also increases the life of the belt.



GRINDING DISCS

Cutoff Wheels



Part Number:	Size:	
MS-0110	1/ _{32"}	Royal
MS-0150	1/ _{16"}	Royal
MS-0316	1/ _{16"}	Premium
MS-1226	1/ _{32"}	Bulldog
MS-1238	1/ _{16"}	Bulldog

FEATURES AND BENEFITS:

- Fast cutting wheels for use when cutting autobody sheet metal, ferrous and non-ferrous metals, fiberglass, plastics and composite materials
- 3 in. diameter with 3/8" center hole
- Rated to 24,000 rpm

Trim-Kut®



Part Number:	Size:	24	36	60	80
63-300-XXX	3"	٠	٠	٠	
63-500-XXX	5"	٠	٠		

FEATURES AND BENEFITS:

- Plastic backing resists breaking and cracking
- Can be trimmed to the 1" core
- Color coded for easy grit identification
- Can be used in grinders and high speed drills with quick change
 mandrels and adapters
- Suitable for use on metal, wood, fiberglass and composite materials

Resin Fiber Discs




Part Number:	Size:	24	50	60
63-578-XXX	5"	٠	٠	
63-778-XXX	7"	•	٠	

FEATURES AND BENEFITS:

- Ceramic Resin Fiber Discs contain 100% SG ceramic grain with a top coat that resists loading and aids in cooling
- Great for metal grinding applications that provides maximum productivity at reduced cost
- Long-life and maximum performance on stainless steel and other alloys

GRINDING DISCS

Mini Strip Away Discs




Part Number:	Size:	
66-200-CS	2"	Orange, 10/Box
66-300-CS	3"	Orange, 10/Box
66-400-CS	4"	Orange, 5/Box

FEATURES AND BENEFITS:

- Open design for fast and cool cutting action
- Cleans welds and removes paint, rust, and coatings without profiling or gouging the metal beneath

MRFD Mini Ceramic Ultra X, Type R



66-201-XXX	2"	٠	٠	٠	٠	•	٠
66-301-XXX	3"	•	•	٠	•	•	

Part Number: Size: 24 36 50 60 80 100 120

FEATURES AND BENEFITS:

- Manufactured with a high quality grain and finer crystalline structure which helps produce an improved self-sharpening effect
- Improved ceramic grain performance with higher stock removal rates
 for metal applications
- Lower grinding temperature rates produce less friction and heat
- Excellent cost/performance ratios

and the		
A CAR		

Part Number:	Size:	Grit:
67-200-MM	2"	Medium
67-300-CG	3"	Coarse
67-200-CG	2"	Coarse
67-300-MM	3"	Medium

FEATURES AND BENEFITS:

- Stripping Discs are made from tough, synthetic fibers impregnated with abrasive grit that offer fast cutting action, without damaging metal surfaces
- Ideal for deburring metal, and removing rust, paint or scale while
 providing a safer alternative to wire bristle tools
- The open design quickly cleans surfaces without damage and provides fast cutting action with virtually no heat build-up

Holder, Type R Grinding Discs

Surface Prep Discs



Part Number:	Size:	
65-002	2"	Holder, Type "R" Grinding Disc, 1/Pkg
65-003	3"	Holder, Type "R" Grinding Disc, 1/Pkg

Grinding Discs 31





POLISH



POLARSHINE[®] POLISHING AND FINISHING COMPOUNDS

Polarshine® 3

Part Number:	Size:	3
FC3-1L	1 Liter	Fotars
		and the second se

FEATURES AND BENEFITS:

- An ultra-fine polishing compound for protecting the high gloss finish on both original paint work and repainted surfaces
- Polishes and seals surfaces
- Contains carnauba wax
- · Leaves a high gloss shine

Ä	
2	
olarshine	
in the second	

Polarshine [®] 5	
Part Number:	Size:
FC5-1L	1 Liter


FEATURES AND BENEFITS:

- High gloss finish without swirl and fine sanding marks
- A medium-fine polish for cleaning and refreshing surfaces
- Suitable for hologram removal
- Silicone-free
- Part of Golden Finish System

Polarshine [®] 12		
Part Number:	Size:	12 Polarshi
PC12-1L	1 Liter	
PC12-5L	5 Liters	

FEATURES AND BENEFITS:

- One-Step polishing compound
- Water-Based and silicone-free
- Removes scratches from P2000 or finer
- Perfect balance of haze and hologram versus speed of cut



-
8 Polarshin

FEATURES AND BENEFITS:

- Designed for single-step polishing in AOEM/Tier1 applications
- Permanently removes deep swirl marks while producing a high gloss finish

Size:

1 Liter

- Keeps surface temperature low when polishing
- Suitable for use on all paint systems
- Silicone-free

Polarshine [®] 15		
Part Number:	Size:	15 Polarshin
PC15-1L	1 Liter	

FEATURES AND BENEFITS:

- A medium coarse polishing compound for removal of P1200 and finer sanding scratches
- For oxidized surfaces and water mark removal on refinish coatings
- Also suitable for removal and leveling
 of fine orange peel
- Silicone-free

Polarshine [®] 45		
Part Number:	Size:	45 Polarshine
PC45-025L	250 ml	
PC45-1L	1 Liter	
PC45-2.8L	2.8 Liters	
PC45-17L	17 Liters	

FEATURES AND BENEFITS:

- Coarse polishing compound for production or restoration processes
- Suitable for hard surfaces and coatings; ideal for gel coat and high gloss lacquers
- Quickly and permanently removes scratches from P600
- Removes heavy oxidation and restores color and shine
- Leaves a deep gloss finish one step polishing for light colors!

Polarshine® 10

Part Number:	Size:
PC10-025L	250 ml
PC10-1L	1 Liter
PC10-5L	5 Liters

FEATURES AND BENEFITS:

- The ultimate single-compound polishing system
- Medium-Coarse polishing compound buffs and polishes simply by changing pads
- Removes sanding scratches without fillers
- Suitable for all paint systems including scratch-resistant clear coats
- Water-based and silicone-free

Polarshine[®] 20

Part Number:	Size:	20 Polarst
PC20-1L	1 Liter	

FEATURES AND BENEFITS:

- Medium-Coarse polishing compound for scratch removal
- Optimized for fresh and soft clear coats
- Water-soluble
- Excellent cut and leaves a very high gloss surface
- Part of Golden Finish system

Polarshine [®] 35	
Part Number:	Size:
PC35-025L	250 ml
PC35-1L	1 Liter
PC35-5L	5 Liters
PC35-17L	17 Liters

FEATURES AND BENEFITS:

- An aggressive polishing compound for removal of P800 and finer sanding scratches, or for heavily oxidized surfaces.
- Can also be used for removal of fine
 orange peel
- Ideal for gelcoats, refinish coatings
 and composites
- Silicone-free

Å
 Polarshine

POLARSHINE® POLISHING AND FINISHING COMPOUNDS

Polarshine® E3		Polarshine [®] 12 I	Black	Polarshine" Pro	o Iridium 1250
Part Number:	Size:	Part Number:	Size: 12 Polarshine	Part Number:	Size:
PE3-1L	1 Liter	PCB12-1L	1 Liter	PC1250-1L	1 Liter
FEATURES AND B	ENEFITS:	FEATURES AND B	ENEFITS:	FEATURES AND B	BENEFITS:
 Designed for polishir on glass surfaces 	ng out scratches	Fine polishing com or restoration proc	pound for production esses	 Developed to rem sanding with Mirka 	ove scratches from spot a® Iridium SR.
 Used on standard win and hardened glass 	ndow glass	 Ideal for dark colou high gloss lacquers 	ired gel coat, s, exposed carbon fibre	 One step solution and hologram free 	
 Removes marks perm 	nanently	 Removes scratches 	from P2000 or finer	• Water-based and s	silicone free
 Silicone-Free 		Restores dark color	ur and shin	• Part of Mirka's Cor	nplete PRO Solution
ishing Is POLISHI	NG LI	GHT CUTTING	MEDIUM CUTT	ING A	GGRESSIVE
twisted wool	-	wool wher	choose foam over 1 polishing?	the polishe	
-	e, the shorter the nap ssive the pad will cut.		l is used for aggressive nile foam pads are not e.	_	polisher at 1500 RPM 'burning" the finish.
		Please refer	to the chart above.		
		POLIS	HING PADS		
		5		 For medium coars Suitable for dry us Easy, grip fastenin The best choice for 	se polishing se 19
	 Easy, grip fastening Washable			• Washable	
Part Number:	Description:		Part Number:	Description:	
MPADBF-3.25	3¼" dia. x 7/8"		MPADLW-3	3" x ¾"	

MPADBF-6F	6" x 1", Flat
MPADBF-6W	6" x 1", Waffle
MPADBF-8	8" dia. x 1¼"



E	LT	PAD	

- Designed for glass polishing applications
- Felt pad construction has good balance
 and stability during polishing
- Designed to be used in combination with Polarshine E3

Part Number:	Description:
MPADFP-3	3" x ¼", Felt Polishing Pad
MPADFP-5	5" x ¼", Felt Polishing Pad

Part Number:	Description:
MPADLW-3	3" x ¾"
MPADLW-6	6" × ¾"
MPADLW-7	7" × ¾"
MPADLW-7.5	7½" x ¾"



•	Medium density pad, for less aggressive
	polishing

- Especially designed for medium coarse
- Easy, grip attachment
- Suitable for most paintwork

MPADWF-8 8" x 11/4"	Part Number:	Description:
	MPADWF-8	8" x 1¼"



ORANGE FOAM PAD

- For aggressive cutting and polishing
- High density, fine textured
- Suitable for most polishing systems
- Easy, grip fastening
- Washable

Part Number:	Description:
5723-OP	35/8" dia. x ½" Flat
MPADOF-3.25	3¼" dia. x 7/8" CCS
MPADOF-6W	6" dia. x 1" Waffle
MPADOF-8	8" dia. x 1¼" Dimple



FOAM POLISHING PAD

- Suitable for hard and medium hard coatings
- Fast cut with good gloss
- Provides stable polishing process
- Washable

Part Number:	Description:
MPADMF-3.25WB	3¼" dia. x1"

QUICK DISCONNECT PADS & ADAPTER



- Adapter fits rotary polishers with 5/8" thread
- Attach or remove pads in seconds
- Secure, perfectly balanced connection to polisher
- Large, double-sided pads

Part Number:	Description:
MPAD-QD	Quick Disconnect Pad Adapter
MPADBF-8QD	8" Quick Disconnect Waffle - Black
MPADWF-8QD	8" Quick Disconnect Waffle - White
MPADOF-8QD	8" Quick Disconnect Waffle - Orange
MPADTW-8QD	8" x 1" Quick Disconnect - Twisted wool

YELLOW FOAM PAD

- For aggressive cutting and polishing
- Waffle face keeps surface cool during polishing
- High density, fine textured
- Suitable for most polishing systems
- Easy grip fastening
- Washable

Part Number:	Description:
MPADYF-3.25W	3¼" x 1", Waffle
MPADYF-6W	6" x 1", Waffle
MPADYF-8W	8" x 1¼", Waffle



YELLOW TWISTED ACRYLIC WOOL PAD

- For medium duty polishing
- Soft edges for easy polishing
- Easy grip fastening
- Washable
- The best choice for a perfect finish

Part Number:	Description:
MPADTWY-6	6" x 1"
MPADTWY-7.5	7½" x 1"
MPADTWY-7.5-1.5	7½" x 1½"



TWISTED WOOL PAD

- For fast cutting, coarse polishing
- Soft edges for easy polishing
- Washable

Part Number:	Description:	
MPADTW-3	3" dia. , Grip	
MPADTW-6	6" dia. x 1", Grip	
MPADTW-7.5	7½" dia. x 1", Grip	
MPADTW-7.5-1.5	7½" dia. 1½" , Grip	
MPADDS-8	8" dia. x 1", Double-Sided, Thread	




YELLOW LAMBS WOOL POLISHING PAD

- Made of premium wool fibers
- For demanding use
- Use in combination with Polarshine[®] 35, 15, 10 and 8
- Suitable for polishing all kinds of paint works


MPADLWY-6 6" dia. x 1"	



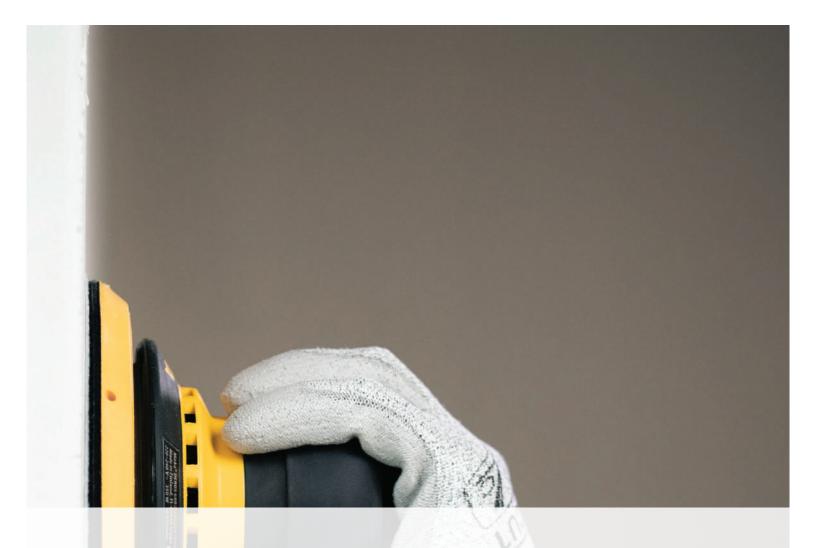



POWER TOOLS

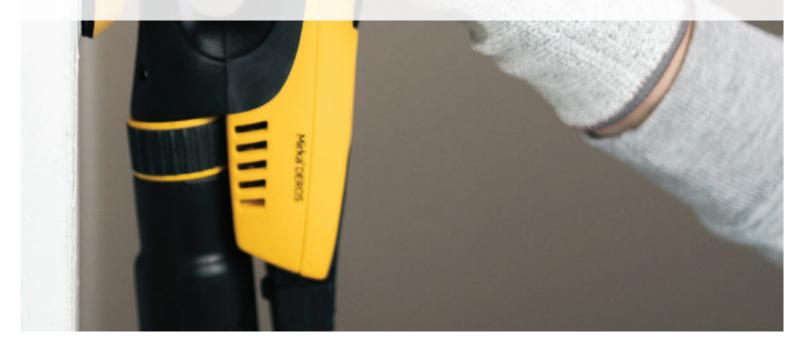

DEROS + DEOS



DEOS and DEROS feature a high-efficiency brushless motor, with plenty of power to get the job done quickly. Their closed construction prevents dust from entering the motor to make it low maintenance and ultra-reliable. Plus, they are vacuum-ready and their power cords are removable and interchangeable.

DEROS Direct Electric Random Orbital Sander



MID3502011US



MID55020CAUS



MID62520CAUS



MID65020CAUS

Part Number	Model Number	Size	Orbit	RPM	Pad Face	Weight	Watts	Noise	Vib m/s²
MID3502011US	350XCV	3"	5 mm	4,000 - 10,000	Multi-Hole, Grip	1.8 lbs	250	67 dB	2.6
MID55020CAUS	550CV	5"	5 mm	4,000 - 10,000	Multi-Hole, Grip	2.2 lbs	350	71 dB	3.2
MID62520CAUS	625CV	6"	2.5 mm	4,000 - 10,000	Multi-Hole, Grip	2.3 lbs	350	71 dB	2.4
MID65020CAUS	650CV	6"	5 mm	4,000 - 10,000	Multi-Hole, Grip	2.3 lbs	350	71 dB	3.4

DEOS

Direct Electric Orbital Sander



MID3430201US



MID3530201US

MID3830201US



MID6630201US - Delta

Part Number	Model Number	Size	Orbit	RPM	Pad Face	Weight	Watts	Noise	Vib m/s ²
MID3430201US	343XCV	3" x 4"	3 mm	5,000 - 10,000	Multi-Hole, Grip	2.15 lbs	250	70 dB	3.3 m/s2
MID3530201US	353XCV	3" x 5"	3 mm	5,000 - 10,000	Multi-Hole, Grip	2.1 lbs	250	69 dB	2.6
MID3830201US	383XCV	2 ¾" x 7 ¾ "	3 mm	5,000 - 10,000	Multi-Hole, Grip	2.2 lbs	250	71 dB	2.6
MID6630201US	663XCV	4" x 6" x 6"	3 mm	5,000 - 10,000	Multi-Hole, Grip	2.1 lbs	250	68 dB	2.6

All Mirka[®] Electric Power Tools Features:

- 1" I.D. hose threaded vacuum fitting
- Brushless DC motor technology
- Comparable power of pneumatic tools but lighter
- Quick connect fitting for the dust extraction hose
- Digitally controlled with variable speeds
- Pair with 'NET' abrasives for a dust-free experience
- Bluetooth connectivity pairs with myMirka App
- On/Off Switch on all models

REPLACEMENT CORDS

Over time, power tool cables can undergo wear and tear. With replacement cords for our electric tools, the cables can be changed by the user without the need for special training. Replacement cords also enable repair of hoses with integrated cables.

Compatible with DEROS, DEOS, and LEROS models.





LEROS + LEROS-S Long Electric Random Orbital Sander

Not only is the Mirka LEROS the lightest, most advanced wall and ceiling sander, it enables perfect surface finishing results and a safe, clean working environment. Its dust-free efficiency dramatically reduces prep and cleanup time.

Plus, the award-winning LEROS is lightweight, putting less strain on operators' arms and shoulders. The large sanding head with 180° swivel helps to get the job done quickly. The long arm can sand ceilings without the need to climb ladders. The shorter arm of the LEROS-S is perfect for fitting into small spaces.



- Lightweight weighs approximately seven pounds
- Flexible sanding head swivels to any angle
- 5 mm random orbital movement provides better surface finish
- Full force system no need to press
- Dual suction points provides efficient dust extraction
- Two lengths available LEROS (57") + LEROS-S (35")

Part Number	Model	Length	Weight	Pad Size	Max Speed	Noise	Power	Vibration	Orbit	Flexibility
MIW95020BAUS	LEROS 950XCV	57"	7.7 lbs	9"	8,000 rpm	73 dB	350 W	< 2.5 m/s ²	5.0mm	180°
MIW95021BAUS	LEROS-S 950XCV	35"	7 lbs	9"	8,000 rpm	73 dB	350 W	< 2.5 m/s ²	5.0mm	140°

RECOMMENDED ACCESSORIES





MV-CLEANKIT Clean-up Kit for Dust Extractors

MIW-EXT	Extension Shaft 19.685"
MIW-BAG	Carry Bag for Mirka [®] LEROS
MIW9514312	Backing Pad 9" 25H Grip Mirka® LEROS + 8 screws
9199	Interface Pad 9" 25H for Mirka® LEROS
8256001001	Net Interface 9" with Spacer, for Mirlon products
9999	Pad Saver 9" 25H for Mirka LEROS

PROS Pneumatic Random Orbital Sander

Mirka PROS pneumatic random orbital sanders are constructed from high quality materials that deliver long term durability, ensuring you will enjoy outstanding performance from your sander long into the future. Optimized ergonomics make it comfortable for long operating periods and allow for two handed use. Choose from Central Vacuum (CV), Self-Generating Vacuum (SGV), and Non-Vacuum (NV) models.



CV: Central Vacuum



SGV: Self-Generating Vacuum



NV: Non-Vacuum

CV: Central Vacuum

Part Number	Model Number	Size	Orbit	RPM	Pad Face	Weight	HP	SCFM	Noise	Vib m/s²
MRP-550CV	550CV	5"	5 mm	12,000	Multi-Hole Grip	2 lbs	0.28	17	74 dB	2.4
MRP-580CV	580CV	5"	8 mm	12,000	Multi-Hole Grip	2 lbs	0.28	17	74 dB	3.8
MRP-625CV	625CV	6"	2.5mm	12,000	Multi-Hole Grip	2 lbs	0.28	17	73 dB	2.3
MRP-650CV	650CV	6"	5 mm	12,000	Multi-Hole Grip	2 lbs	0.28	17	75 dB	3.2
MRP-680CV	680CV	6"	8 mm	12,000	Multi-Hole Grip	2 lbs	0.28	17	76 dB	3.4

SGV: Self-Generating Vacuum

Part Number	Model Number	Size	Orbit	RPM	Pad Face	Weight	HP	SCFM	Noise	Vib m/s ²
MRP-550SGV	550DB	5"	5 mm	12,000	Multi-Hole Grip	2 lbs	0.28	17	81 dB	2.8
MRP-650SGV	650DB	6"	5 mm	12,000	Multi-Hole Grip	2 lbs	0.28	17	78 dB	3.0

NV: Non-Vacuum

Part Number	Model Number	Size	Orbit	RPM	Pad Face	Weight	HP	SCFM	Noise	Vib m/s ²
MRP-525NV	525NV	5"	2.5 mm	12,000	PSA	2 lbs	0.28	17	74 dB	2.4
MRP-550NV	550NV	5"	5 mm	12,000	PSA	2 lbs	0.28	17	74 dB	2.4
MRP-580NV	580NV	5"	8 mm	12,000	PSA	2 lbs	0.28	17	74 dB	3.8
MRP-650NV	650NV	6"	5 mm	12,000	PSA	2 lbs	0.28	17	74 dB	3.2
MRP-680NV	680NV	6"	8 mm	12,000	PSA	2 lbs	0.28	17	75 dB	3.4

DID YOU KNOW?

PROS tools make sanding and polishing...

Easy: The PROS includes an air inlet extension to make connecting to air source easy.

Comfortable: PROS tools have an ergonomic design that allows one or two hand operation.

Safe: PROS have a locking feature to prevent accidental tool running while changing pads.





Pneumatic Belt Sanders

The Mirka PBS-10330 and the Mirka PBS-13457 are user-friendly and ergonomic tools that are powerful yet quiet to use. Comfortable to hold with a cushioned rubber grip, the grinding speed is easy to set with a top-mounted selector.

Tension mechanisms make the belts easy to change in just a matter of seconds, and the arm angle of the tools are quickly adjusted with a key that is stored right in the handle.

FEATURES AND BENEFITS:

- Safety cover throws debris away from operator
- Accessible tension mechanism easy-to-change belts
- Speed regulator on top of tool effortless adjustment
- Hex key stores in the handle at hand for quick angle adjustment
- Easily reset angle get into hard-to-reach places quickly
- Rubber-coated handle doesn't get cold comfortable to hold
- Low noise level preferred belt sander for daily use
- Competitive pricing affordable addition to tech's toolkit





PBS-10330

PBS-13457

Part Number	Model Number	Belt Size	Weight	Speed	Noise	Watts	Air Consumption	Vib m/s ²
PBS-10330	10NV	.4" x 13"	1.79 lbs	17,000/min	85.7 dB	417.6	610 l/min	1.88 m/s ²
PBS-13457	13NV	.5" x 18"	2 lbs	20,000/min	85 dB	522	800 l/min	1.04 m/s ²



DID YOU KNOW?

The Mirka PBS-10330 and the Mirka PBS-13457 are user-friendly and ergonomic tools that are powerful yet quiet to use. Comfortable to hold with a cushioned rubber grip, the grinding speed is easy to set with a top-mounted selector.



Tension mechanisms make the belts easy to change in just a matter of seconds, and the arm angle of the tools are quickly adjusted with a key that is stored right in the handle.

Watch the Pneumatic Belt Sanders in action!

MR-Series Pneumatic Tools

MR-SERIES ROUND PNEUMATIC SANDERS

Mirka's MR-Series Pneumatic Sanders are constructed of precision molded composites for strength and durability. This construction also reduces weight and sound for increased operator comfort. Moisture-resistant composite rotors and premium counterweight bearings ensure superior reliability.

The sanders' orbital motion leaves the surface easy to polish. Select from a wide range of sizes to accommodate square or round abrasives and dust-removal systems (CS, SGV, and NV).



CV: Central Vacuum



NV: Non-Vacuum



SGV: Self-Generating Vacuum

CV: Central Vacuum

Part Number	Size	Orbit	RPM	Pad Face	Weight	HP	SCFM	Noise	Vib m/s ²
MR-350CV	3"	5 mm	12,000	6-Hole Grip	1.17lbs	0.28	17	80 dB	-

NV: Non-Vacuum

Part Number	Size	Orbit	RPM	Pad Face	Weight	HP	SCFM	Noise	Vib m/s ²
MR-3	3"	2.5 mm	12,000	Grip	1.12 lbs	0.28	17	76 dB	3.04
MR-350	3"	5 mm	12,000	PSA	1.12 lbs	0.28	17	80 dB	2
MR-5	5"	5 mm	12,000	PSA	1.7 lbs	0.28	17	80 dB	2.6
MR-508	5"	8 mm	12,000	PSA	1.7 lbs	0.28	17	74 dB	3.5
MR-525	5"	2.5 mm	12,000	PSA	1.7 lbs	0.28	17	80 dB	2.1
MR-6	6"	5 mm	12,000	PSA	1.74 lbs	0.28	17	79 dB	3.7
MR-608	6"	8 mm	12,000	PSA	2 lbs	0.28	17	75 dB	3.5
MR-625	6"	2.5 mm	12,000	PSA	1.87 lbs	0.28	17	83 dB	3.3

SGV: Self-Generating Vacuum

Part Number	Size	Orbit	RPM	Pad Face	Weight	HP	SCFM	Noise	Vib m/s ²
MR-3SGV	3"	2.5 mm	12,000	6-Hole Grip	1.3 lbs	0.28	17	84dB	2.6
MR-5SGV	5"	5 mm	12,000	Multi-Hole Grip	1.85 lbs	0.28	17	85 dB	2.5
MR-508SGV	5"	8 mm	12,000	Multi-Hole Grip	1.85 lbs	0.28	17	91 dB	3.3
MR-6SGV	6"	5 mm	12,000	Multi-Hole Grip	1.94 lbs	0.28	17	83 dB	2
MR-608SGV	6"	8 mm	12,000	Multi-Hole Grip	2.2 lbs	0.28	17	82 dB	3.3

MR-Series Pneumatic Tools

CV: Central Vacuum

MR-SERIES SQUARE PNEUMATIC SANDERS







SGV: Self-Generating Vacuum

CV: Central Vacuum

Part Number	Model Number	Size	Orbit	RPM	Pad Face	Weight	HP	SCFM	Noise	Vib m/s ²
MR-38CV-1	OS 383CV	2¾" x 7¾"	3 mm	10,000	Multi-Hole Grip	2.1lbs	0.24	16	75 dB	3.3

NV: Non-Vacuum

Part Number	Model Number	Size	Orbit	RPM	Pad Face	Weight	HP	SCFM	Noise	Vib m/s ²
MR-34	_	3" x 4"	3 mm	10,000	Grip	1.5 lbs	0.24	16	76 dB	2.6

SGV: Self-Generating Vacuum

Part Number	Model Number	Size	Orbit	RPM	Pad Face	Weight	HP	SCFM	Noise	Vib m/s²
MR-34DB	OS 343DB	3" x 4"	3 mm	10,000	Multi-Hole Grip	1.6 lbs	0.24	16	81 dB	2.02
MR-35SGV	OS 353DB	3" x 5"	3 mm	10,000	Multi-Hole Grip	1.8 lbs	0.24	16	84 dB	2.3
MR-38SGV	OS 383DB	2¾" x 7¾"	3 mm	10,000	Multi-Hole Grip	2.1 lbs	0.24	a 16 17	85 dB	2.8



DID YOU KNOW?

The MR-38CV-1, also known as a power block, is a great tool for block sanding. It straightens and flattens like a traditional hand block but leaves behind a scratch pattern like a 5" or 6" dual action sander, which doesn't require a great amount of effort to refine straight line scratches. This sander does it all with effortless guidance.

Two-Handed Pneumatic Tools

The second handle adds stability and control while reducing operator fatigue - it can be removed when not needed. The large orbit allows you to cover a wide area in less time with aggressive sanding and polishing.

Constructed of precision-molded, moisture-resistant composites for strength and durability. A storage hanger and backing pad are included.



CV: Central Vacuum



SGV: Self-Generating Vacuum



NV: Non- Vacuum



MROP: Random Orbital Polisher

TWO-HANDED POLISHERS

NV: Non-Vacuum

Part Number	Model Number	Size	Orbit	RPM	Pad Face	Weight	HP	SCFM	Noise	Vib m/s ²
MR-30TH	RP2 300NV	3"	0	3,000	Grip	2.1 lbs	0.28	17	85 dB	1.2
MROP-312TH	ROP2 312NV	3"	12 mm	10,000	Grip	2.6 lbs	0.37	19	80 dB	5.9
MROP-512TH	ROP2 512NV	5"	12 mm	10,000	PSA	2.7 lbs	0.46	21	81 dB	5.8

TWO-HANDED SANDERS

NV: Non-Vacuum

Part Number	Model Number	Size	Orbit	RPM	Pad Face	Weight	HP	SCFM	Noise	Vib m/s ²
MR-510TH	—	5"	10 mm	12,000	PSA	2.7 lbs	0.46	21	85 dB	3.4
MR-610TH	—	6"	10 mm	12,000	PSA	2.8 lbs	0.46	21	87 dB	3.3

CV: Central Vacuum

Part Number	Model Number	Size	Orbit	RPM	Pad Face	Weight	HP	SCFM	Noise	Vib m/s ²
MR-610THCV	ROS2 610CV	б"	10 mm	12,000	Multi-Hole Grip	2.9 lbs	0.46	21	81 dB	3.4
MR-850THCV	ROS2 850CV	8"	5 mm	10,000	Multi-Hole Grip	3.5 lbs	0.46	23	77 dB	4.8

SGV: Self-Generating Vacuum

Part Number	Model Number	Size	Orbit	RPM	Pad Face	Weight	HP	SCFM	Noise	Vib m/s ²
MR-610THSGV	ROS2 610DB	6"	10 mm	12,000	Multi-Hole Grip	2.9 lbs	0.46	21	81 dB	-

MR-Series Pneumatic Tools

1.25" MR-SERIES NON-VACUUM PNEUMATIC SANDERS

Precision-molded composite construction gives Mirka's MR-Series of 1.25" Round Pneumatic Sanders strength, durability, and reduced weight. The sanders' orbital motion makes spot repair and minor surface finishing easy to polish out.



MAOS130	AOS 130NV	11⁄4"	3 mm	8,500	PSA	1.32 lbs	0.48	18	75 dB	2.22
MROS125	ROS 125NV	11⁄4"	2.5 mm	8,000	PSA	1.06 lbs	0.15	15	67 dB	-
MROS150	ROS 150NV	11⁄4"	5 mm	8,000	PSA	1.08 lbs	0.15	15	71 dB	2.33

3" MR-SERIES PNEUMATIC POLISHERS

Pneumatic Polishers make quick work of removing scratches when paired with wool or foam polishing pads. MR-Series polishers have reduced weight and sound for increased operator comfort.



MRAP-30



MR-30

Part Number	Model Number	Size	Orbit	RPM	Pad Face	Weight	Watts	HP	SCFM	Noise	Vib m/s ²
MRAP-30	AP 300NV	3"	0 mm	3,200	Grip	1.45 lbs	298	-	-	76 dB	1.34
MR-30	RP 300NV	3"	0 mm	3,000	Grip	1.2 lbs	-	0.28	17	81 dB	1.4



BPA10825 Intelligent Battery 10.8V 2.5Ah



BPA10850

10.8V 5.0Ah

Intelligent Battery

Replacement batteries can be found on page 59.

DID YOU KNOW?

With Bluetooth and the myMirka® dashboard, you can easily monitor battery health status and available capacity. The Mirka® intelligent Li-ion battery allows a precise capacity measurement based on a coulomb counter.

It is possible to monitor individual cell voltage and, together with the coulomb counter, prolong the usage time. The firmware in the battery is upgradeable via the Bluetooth connection to the sander/polisher.

The 10.8V 2.5Ah battery has 3 cells and charging time is approximately 45 minutes. The 10.8V 5Ah battery has 6 cells and charging time is approximately 90 minutes.

my Mirka" 🛞 Bluetooth

Cordless Tools

Mirka cordless tools are light, ergonomic, and optimized for efficiency and portability, allowing freedom of movement without hoses or cables. Incredibly nimble, they are quiet, small, and low maintenance thanks to the brushless motor.

To minimize downtime, cordless tools come with two batteries and a charger so one can be recharging while the other is in use. Sanders and polishers come with two 2.5 Ah 10.8V Li-ion batteries. The ANGOS grinder comes with two 5.0 Ah batteries (we recommend using only 5.0 Ah batteries with the grinder).

For a comprehensive cordless system, combine Mirka cordless sanders, polishers, and grinders with our spot repair abrasives, polishing compounds, and grinding discs.



CORDLESSS POLISHERS





ARP300-B

AROP312-B

Part Number	Model Number	Size	Orbit	RPM	Pad Face	Weight	Watts	Noise	Vib m/s ²
ARP300-B	ARP-B 300NV	3"	0 mm	1,500 - 2,200	Grip	1.9 lbs	0.28	57 dB	1.8
AROP312-B	AROP-B 312NV	3"	12 mm	4,000 - 7,000	Grip	2 lbs	0.28	60 dB	4.3
AROP312-B-NV	Tool without batterie s and charger								

CORDLESSS GRINDER



Part Number	Model	Max Pad Size	Collet Size	Weight	Max Speed	Noise	Voltage	Vib m/s ²
ARG-B-200	ANGOS ARG-B 200 US	2"	1/4"	1.96 lbs	20,000/min	66 dB	10.8 VDC	2.5 m/s ²





ESSENTIALS

0

711

- 200

- 150

- 100

- 50ml

MIRKA ESSENTIALS TAPES + FILMS



9190113001 Foam Tape Type: Masking Tape .5" x 164', 1/Roll



9190165001 Foam Tape Premium Type: Masking Tape .79" x 164', 1/Roll



9190167001 Lifting Tape Perforated Type: Masking Tape 2" x 32.8', 1/Roll



9190220001 Black Cloth Tape Type: Specialty Tape 2" x 164', 1/Roll



9190221001 Flexi No Edge Blending Tape Type: Masking Tape .59" x 82', 1/Roll



9190222001 DUO Masking Tape Type: Specialty Tape 3" x 65.6', 1/Roll



9190320001 Grey Acrylic Double-Sided Tape Type: Fastening Tape .24" x 59', 1/Roll



9190320002 Grey Acrylic Double-Sided Tape Type: Fastening Tape .47" x 59', 1/Roll



9190320003 Grey Acrylic Double-Sided Tape Type: Fastening Tape .87" x 59', 1/Roll



9190320004 Emblem Tape Type: Specialty Tape 2" x 11.8", 1/Roll



9191004801 100°C White Line Type: Masking Tape 1.88" x 164'



9190320005 Orange Fine Line Tape Type: Masking Tape .12" x 108', 1/Roll



9190320006 Orange Fine Line Tape Type: Masking Tape .24" × 108', 1/Roll



9190320007 Orange Fine Line Tape Type: Masking Tape .47" x 108', 1/Roll



9190320008 Grey Number Plate Tape Type: Fastening Tape .24" x 16.4', 1/Roll



9191003601 100°C White Line Type: Masking Tape 1.4" x 164'



9191001801 100°C White Line Type: Masking Tape .7" x 164'



9191251801 Masking Tape 120° Yellow Line .71" x 180', 48/Pack



9191252401 Masking Tape 120° Yellow Line .94" x 180', 36/Pack



9191253601 Masking Tape 120° Yellow Line 1.42" x 180', 24/Pk



9191254801 Masking Tape 120° Yellow Line 1.89" x 180', 18/Pk



9190110017 Masking Film Premium 12' x 400' x 14µ, Blue



9190110018 Masking Film Premium 16' x 350' x 14µ, Blue



9190110019 Masking Film Premium 20' x 250' x 14µ, Blue

MIRKA ESSENTIALS PAINT CUPS















Paint Cup System, 180-850ml, Filter Lid 125µm

Part Number	Size	Pcs/pack
9190170180	180ml	50
9190170400	400ml	50
9190170650	650ml	50
9190170850	850ml	50

Paint Cup System, 180-850ml, Filter Lid 190µm

9190172180 180ml 50 9190172400 400ml 50 9190172650 650ml 50	Part Number	Size	Pcs/pack
	9190172180	180ml	50
9190172650 650ml 50	9190172400	400ml	50
	9190172650	650ml	50
9190172850 850ml 50	9190172850	850ml	50

UV Paint Cup System, 400-650ml, Filter Lid 125µm

Part Number	Size	Pcs/pack
9190171400	400ml	50
9190171650	650ml	50

Replacement Paint Cups and Stoppers

Part Number	Size	Pcs/pack
9190173180	180ml	2
9190173400	400ml	2
9190173650	650ml	2
9190173850	850ml	2
9190175015	Stoppers for PCS	20/pack

Filter Lids

Part Number	Size	Pcs/pack
9190175021	180ml, 125um	50
9190175022	400ml, 125um	50
9190175023	650-850ml, 125um	50
9190175025	650-850ml, 190um	50
9190175026	Stoppers for PCS	50

Paint Cups Accessories

Part Number	Size	Pcs/pack
PAINT SHAKER LID	For all Sizes	1
9190175015	For all Sizes	20

Dispenser for Paint Cups, 180-400ml OR 650-850ml cups

Part Number	Size	Pcs/pack
9190175012	180-400ml	1
9190175013	650-850ml	1

Dispenser for Paint Cup Lids

Part Number	Size	Pcs/pack
9190175010	For all lids	1

The set includes:

- 50 liners and lids with a 125 μm filter
- 20 stoppers
- 1 outer hard cup + 1 collar

The set includes:

- 50 liners and lids with a 190 μ m filter
- 20 stoppers
- 1 outer hard cup + 1 collar

This paint cup system, with the black liner and lid, is UV-resistant.


The set includes:

- 50 liners and lids with a 125 μm filter
- 20 stoppers
- 1 outer hard cup + 1 collar

Outer cup with collar.



PCS SPRAY GUN ADAPTER VERSIONS

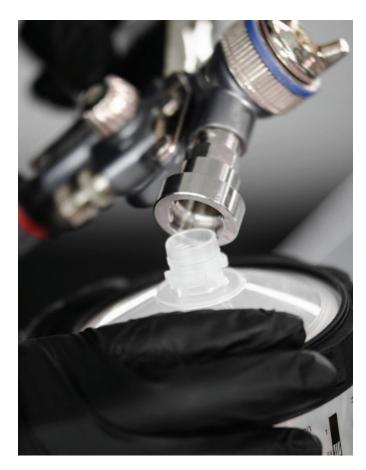

Adapter in stainless steel for connecting the paint cup system to the spray gun. All parts of the adapter are corrosion-resistant to both paint and thinner.

Part Number	Adapter Version	Pcs/pack
9190171101	1	50 (sold per pcs)
9190171102	2	50 (sold per pcs)
9190171103	3	50 (sold per pcs)
9190171120	3S	50 (sold per pcs)
9190171104	4	50 (sold per pcs)
9190171105	5	50 (sold per pcs)
9190171106	6	50 (sold per pcs)
9190171107	7	50 (sold per pcs)
9190171108	7M	50 (sold per pcs)
9190171109	9	50 (sold per pcs)
9190171110	10	50 (sold per pcs)
9190171111	11	50 (sold per pcs)
9190171112	12	50 (sold per pcs)
9190171113	13	50 (sold per pcs)
9190171114	14	50 (sold per pcs)
9190171115	15	50 (sold per pcs)
9190171116	16	50 (sold per pcs)
9190171117	17	50 (sold per pcs)
9190171118	18	50 (sold per pcs)
9190171119	19	50 (sold per pcs)
9190171121	E	50 (sold per pcs)
9190171122	M2	50 (sold per pcs)
9190171140	20	50 (sold per pcs)
9190171141	21	50 (sold per pcs)



Version 1



Version 6



Version 12





Version 13



Version 19

Version 18

Version 2

Version 7



Version 3



Version 7M



Version 14



Version 20



Version 3S









Version E

Version 5



Version 11

Version 17



Version M2

49



Version 15



Version 21

Version 10























Version 16

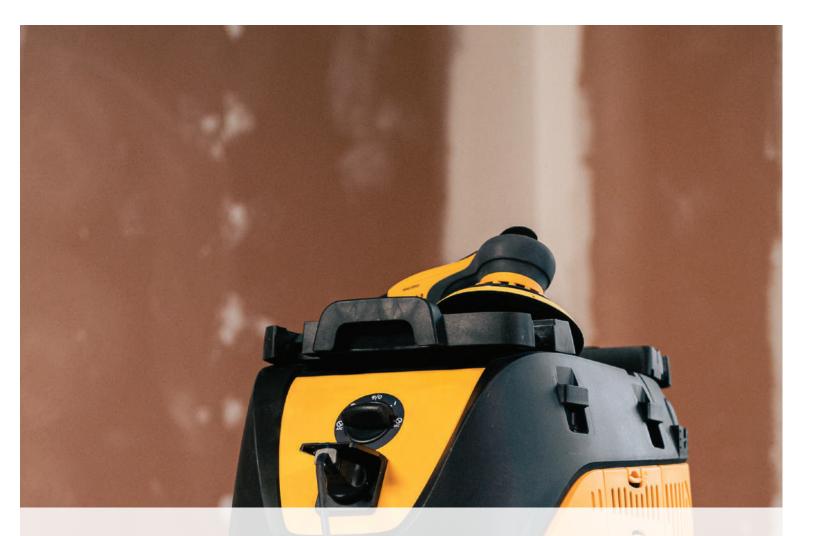



DUST-FREE SYSTEMS



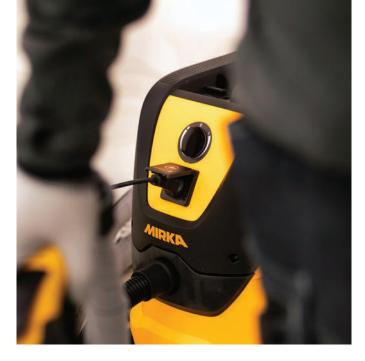

DUST-EXTRACTORS

HEPA Certified to meet EPA Renovation, Repair, and Painting (RRP) Guidelines.



DE-1230-PC Dust Extractor - HEPA 15¼" x 22¼" x 22¼"



DE-1230-AFC Dust Extractor - HEPA 15¼" x 22¼" x 22¼" Automatic Filter Cleaning

Part Number:	Volts	Frequency	Volume Air Flow	Vacuum	Volume	Weight	Watts	Sound Pressure	Noise, Lpa
DE-1230-PC	110 - 120 ~	60 Hz	4500 l/min	250 mbar	8 gal (30 l)	32 lbs	1000	62 dB	59 dBA
DE-1230-AFC	110 - 120 ~	60 Hz	4500 l/min	250 mbar	8 gal (30 l)	32 lbs	1000	62 dB	59 dBA

DUST-EXTRACTOR FEATURES:

Push & Clean Filter Cleaning

Easy way to clean the filter for longer life time and better performance.

Easily Accessible Flat Filter

Filter can easily be reached through an opening in the back.

Hose Storage ______ The hose is always ready to use.

HEPA Filter -

The HEPA (High Efficiency Particulate Air) filter improves filtration.

High Volume Container -

8 gallons for applications where a lot of material is extracted.

Large Wheels

Easy maneuverability on uneven surfaces.

High Performance Motor & Turbine -

1000 W motor and 1-stage turbine creates 250 mbar pressure and 4500 l/min airflow.

AutoStart Function -

Dust Extractor runs only when the power tool is running.



DID YOU KNOW?

This HEPA certified dust extractor is an integral part of our dust-free sanding systems with three layers of dust protection. It is ideal for use with both Mirka's electric and pneumatic tools as well as with our ergonomic hand-sanding blocks.

Its high performance motor and turbine create 250 mbar vacuum and 4500 l/min air flow. The AutoStart function increases the life of the motor and reduces noise. The flat top gives space for storage and the large wheels improve maneuverability.

DUST EXTRACTOR ACCESSORIES

DE-FILT

Filter Element



MIE9017211 14' MIE9016811 21' MIE9016911 34' Replacement Cords



DE-1200PB Pneumatic box



DE-FDB Fleece dust bag



HEPA filter element

DE-HEPA



DE-TCFS Tool case fastening system





MIN6532011 Mirka Case T-LOC 15.7" x 11.8" x 6.2"

MIN6529211 Electric Sander Cord/Hose Straps, 6/Pkg.

DE-HANDLE Handle extension

MV-912PB

Pneumatic Control

Box for MV-912



MV-412FE Filter Element for MV-912

MPA0412

1.1" x 5.9'

ROS Vac Hose

MV-412DOK

sanders with one dust extractor

Kit Allows use of two



MV-912DB Fleece Dust Bag for MV-912



MV-CLEANKIT Clean-up Kit for Dust Extractors

HOSES + HOSE CONNECTIONS



MV-412HA Vacuum Hose with Coaxial 1" x 18'



MIE6515921 Sleeve for Hose and Cable 19'



MIN6519411 Vacuum Hose & Adapter 1" x 13', 1/Pkg.



MIE6515931 Mirka Sleeve for Hose and Cable 32.1'



MV-412HA-ADAP Adapter & Vacuum Hose 1" x 19.7"

MV-HA33

Vacuum Hose

with Coaxial 1" x 33'

MIE6515711US Mirka Sleeve + Cable 110V + Hose 19.7' US, 1/Pkg.

8992515411

Sanders 1" Soft

Adapter for DEROS/PROS



91100-A

3⁄4" x 13'

Hose for Hand Block

MIE6515611US Mirka Sleeve + Cable 110V + Hose 32.8' US, 1/Pkg.





8992515611 Vacuum Hose Adapter 11⁄4"/2.12"



MV-DOF-A Vacuum Dual Operator Dual Y Air Supply Fitting

MIE6515911

Sleeve for Hose


and Cable 111/2'



8391111211 Connector Air Inlet for Hand Block 3/4" / 3/4"


Dual Y Vacuum Fitting

MV-DOF-V

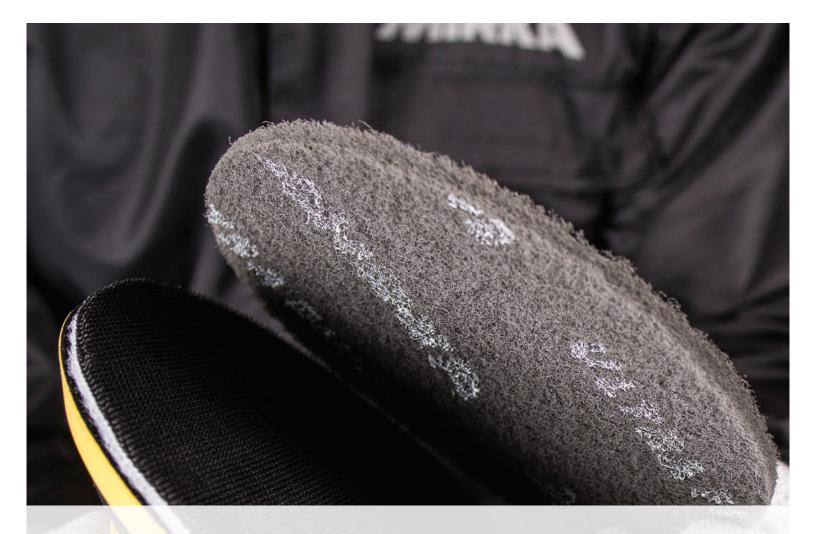



ACCESSORIES

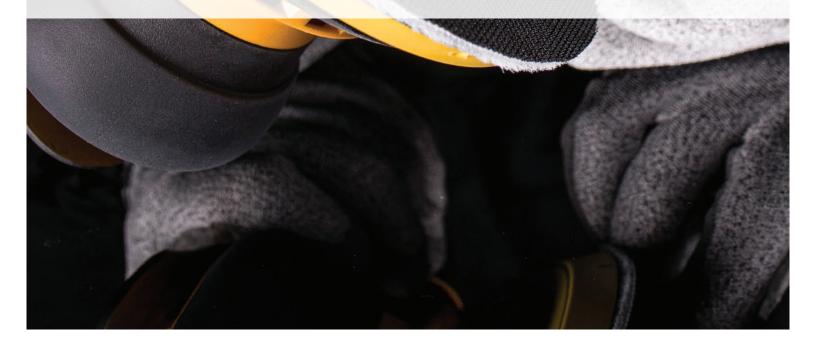

HAND SANDING TOOLS + ACCESSORIES



AF4401 Hand Sanding Block 25/8" x 51/2" PSA, 1/Pkg.



AF4402 Hand Sanding Block 25/8" x 101/2" PSA, 1/Pkg.



AF4417 Grip Faced DuraBlock Hand Sanding Block 25/8" x 51/2"



AF4418 Grip Faced DuraBlock Hand Sanding Block 2⁵/8" x 11"



AF4419 Grip Faced DuraBlock Hand Sanding Block 2⁵/8" x 16"



DHP34 3" x 4" Dual Density Pad



AF44A Hand Sanding Block Kit 6-Piece PSA/Plain, 1/Pkg.



103DGHP Hand Pad 3" Grip 1H

121-002

Hand Sanding Block

2.5" x 5" x 5/8" Plain



105HP Hand Pad 5" x ¼" PSA w/Strap

135G

Hand Pad 3"x5" Grip



Hand Sanding Block Kit 7-Piece Grip, 1/Pkg.

AF44HL

105HPGG8 Hand Pad 5" x 1/8" Grip



105HPHRG Hand Pad 45/8" Grip Half-Round



150G Hand Pad 5" Grip



106HPHRG Hand Pad 45/8" Grip Half-Round



150V Hand Pad 5" PSA



AIRKE

HB-39 Handy Sanding Block 3" x 9", Grip, 55H



HB-39KIT Handy Block Kit 3" x 9" Grip Asst., 55H, w/Hose



KIT00ROUND Roundy Kit, 1/Pkg



MVHB35 Grip Faced, Multi-Hole Vacuum Block, 234" x 5"



MVHB38 Grip Faced, Multi-Hole Vacuum Block, 234" x 734"



MVHB38-K

Multi-hole vacuum block with four grip-faced attachments (Convex, Concave, Slightly Concave and Flat), 23/4" x 73/4"

w/Strap



135V Hand Pad 3"x5" PSA

HAND SANDING TOOLS + ACCESSORIES



9116F Flexible Grip Faced, Multi-Hole Vacuum Block, for convex and concave shapes 2¾" x 16½"



9116R Rigid Grip Faced, Multi-Hole Vacuum Block. for straight sided shapes 2¾" x 16½"



9190143011 Roundy Dust-Free Hand Block, 1/Pkg

BACKUP PADS



9300

Deco Sander - A flat, dust-free sanding head connects to a telescopic tube via flexible joint that allows it to sit flat against walls and ceilings. 2³/₄" x 8" Grip 113H, 1/Pkg.

1125 1¹/₄" Backup Pad Medium, PSA 1⁄4 - 20 thread



1125G 1¼" Backup Pad Medium, Grip 1⁄4 - 20 thread



1132-R 1¹/₄" Backup Pad Soft, PSA, Quick Lock CPD



1125H-R 1¼" Backup Pad Hard, PSA, with Twist-Lock Attachment



1079H-R 0.79" Backup Pad Hard, PSA, Twist-Lock Attachment



1125S 1¹/₄" Backup Pad Soft, PSA, ¼ - 20 thread

912SGV

Soft, Grip

2" Backup Pad



1125S-R 1¼" Backup Pad Soft, PSA, with Twist-Lock Attachment



1125SG-R 1¹/₄" Backup Pad Soft, Grip, with Twist-Lock Attachment



102GG 2⁷/₈" Backup Pad Medium, Grip 5/16 - 24 thread



913G 3" Backup Pad Medium, Grip 1/4 - 20 thread





913GV 3" Backup Pad Medium, Grip, Multi-Hole 1/4 - 20 thread



913GV-A 3" Backup Pad æ Grip, Multi-Hole w/adapters. For common sanding tools



103HD 3¹/₂" Backup Pad Heavy-Duty, PSA 5/16 - 24 thread



105GGP 5" Backup Pad Grip, J Hook 5/16 x 24



105HDGP 5" Backup Pad Grip Heavy-Duty, J Hook 5/8 - 11 thread




105 5" Backup Pad Medium, PSA 5/16 - 24 thread



105GV 5" Backup Pad Medium, 5-Hole Grip, 5/16 - 24 thread



105B 5" Backup Pad Medium, PSA 5/16 - thread



105GVBD 5" Backup Pad Multi-Hole Grip for Black and Decker 5" electric tool



105G 5" Backup Pad Medium, Grip 5/16 - thread



105H 5" Backup Pad Medium, PSA, Hardened Shank, 5/16 - 24 thread



5" Backup Pad Medium, Grip, J Hook 5/16 - 24 thread



105HD 5" Backup Pad Heavy-Duty, PSA

BACKUP PADS



105P 5" Backup Pad Medium with Flexible Edge, PSA, 5/16 -24 thread



105PG 5" Backup Pad Medium with Flexible Edge, Grip, 5/16 - 24 thread



105S 5" Backup Pad Soft, PSA 5/16 - 24 thread



105SG 5" Backup Pad Soft, Grip 5/16 - 24 thread



105SGV 5" Backup Pad Soft, 5-Hole, Grip 5/16 - 24 thread



105V 5" Backup Pad Medium, 5-Hole, PSA 5/16 - 24 thread




915GV 5" Backup Pad Multi-Hole, Grip 5/16 - 24 thread




915GV28* 5" Backup Pad Medium, Multi-Hole, Grip 5/16 - 24 thread



915GV28-130G 5" Backup Pad Medium, Multi-Hole, Grip 5/16 - 24 thread. Allows for use of 5" abrasives on 6" sander



915SGV 5" Backup Pad Soft, Multi-Hole



915SGV28* 5" Backup Pad Soft, Multi-Hole, Grip 5/16 - 24 thread



MPADBU-5 5" Backup Pad Grip



106 6" Backup Pad Medium, PSA 5/16 - 24 thread



106P 6" Backup Pad Flexible Edge, PSA 5/16 - 24 thread



106SG 6" Backup Pad Soft, Grip 5/16 - 24 thread



106B 6" Backup Pad No-Hole Medium, PSA 5/16 - thread



106SGV 6" Backup Pad Soft, 6-Hole, Grip 5/16 - 24 thread




106GG

6" Backup Pad

906GV 6" Backup Pad Medium, 16-Hole Plenum Vacuum, Grip 5/16 - 24 thread



106GM 6" Backup Pad Medium Grip for Mirlon Discs 5/16 24 thread



916GV 6" Backup Pad Medium, Multi-Hole, Grip 5/16 - 24 thread



106GV

6" Backup Pad

5/16 - 24 thread

Medium, 6-Hole, Grip

BACK UP PADS



916GV48* 6" Backup Pad Medium, 48-Hole, Grip 5/16 - 24 thread



108 8" Backup Pad PSA, 5/8 - 11 thread



916SGV

6" Backup Pad

108GG 8" Backup Pad Grip, 5/8 - 11 thread



916SGV48* 6" Backup Pad Soft, Multi-Hole, Grip 5/16 - 24 thread



108GV 8" Backup Pad Grip, 8-Hole

934GV



MPADBU-6 6" Backup Pad Grip



908GV 8" Backup Pad Medium, Multi-Hole, Grip for MR-850THCV



908M5GV 8" Backup Pad Grip, 8" Ntl. Detroit

MPADBU-7

7.875" Backup Pad




MIW9514312 9" Backup Pad Grip for Mirka® LEROS

935GV-E (electric)

Multi-Hole, Grip, w/pad saver

3" x 5" Backup Pad



934 3" x 4" Backup Pad PSA, Tapers at the top

938GV

Multi-Hole, Grip



2¾" x 7¾" Backup Pad



3" x 4" Backup Pad

Multi-Hole, Grip

938GV-E (electric) 2¾" x 7¾" Backup Pad Multi-Hole, Grip



934GV-E 3" x 4" Backup Pad (for DEOS 343) 29-Hole, Grip




963GV 4" x 6" x 6" Backup Pad Medium, Multi-Hole, Grip



935GV 3" x 5" Backup Pad Multi-Hole, Grip w/pad saver



MIW9564411 9" 9-Hole Grip Styro Backing Pad



* Best results when used with Mirka® DEROS and PROS tools

DID YOU KNOW?

Mirka power sanders can take a beating, thanks in large part to backup pads. Over time, backup pads wear out and lose their shape, preventing full contact with the surface being sanded and causing an inconsistent finish. Replacing the pad is a simple matter, restoring the sander's effectiveness.

You can extend the life of your backup pad by using a pad protector when not in use, as well as an interface pad between the backup pad and the abrasive. Depending on the thickness, an interface pad can also make the backing pad softer for contour or edge sanding.

INTERFACE PADS



1033 3" dia. ½" thick Grip



1055F 5" dia. ¼" thick Grip, 5-Hole



1066 6" dia. ½" thick Grip, 6-Hole



9166-5 6" dia. ¼" thick Multi-Hole Grip



9133 3" dia. ⅔" thick Grip, 6-Hole



1055Y 4%" dia. 1" thick Grip, 5-Hole



1066F 6" dia. ¼" thick Grip



9199 9" dia. 1/8" thick Grip, 25-Hole



9135 3" x 5" ¼" thick Multi-Hole Grip



9155 5" dia. 3%" thick Multi-Hole Grip



1066SF 6" dia. ¾" thick Grip, Soft Faced



91495 2¾" x 5" x ¾" Grip, Block, Multi-Hole



9934 3" x 4" x ¼" Grip, 33-Hole



9155-5 5" dia. ¼" thick Multi-Hole Grip



9116-M 6" dia. 1/5" thick Net Interface, MIRLON



91505 2¾" x 7¾" x ¾" Grip, Block, Multi-Hole



91528Y ⁴%" dia. 1" thick Multi-Hole Grip



91528 5" dia. %" thick Multi-Hole Grip



9166 6" dia. ¾" thick Multi-Hole Grip



MIW9535611 9" dia. 9-Hole Styro Interface, Grip




9138 2¾" x 7¾" x ½" Multi-Hole Grip



9947 3" dia. 1/8" thick Multi-Hole Grip



9134 3" x 4" x 1/8" Multi-Hole Grip





99528 5" dia. 1/8" thick Multi-Hole Grip

9935

3" x 5" 1/8" thick

Multi-Hole Grip



9955 5" dia. 1/8" thick Multi-Hole Grip



8295902011 4" x 6" x "6 Grip, 32-Hole



9956 6" dia. 1/8" thick Multi-Hole Grip



9999 9" dia. Grip, 25-Hole



9958 8" dia. 1⁄8" thick Multi-Hole Grip

MISCELLANEOUS ACCESSORIES



9193500111 Black Dry Guide Coat 100g



9193600111 White Dry Guide Coat 100g



S-BLADE Shark Blade Denibbing Tool 2" x 1"



SR-CDBOT Finessing Damper 1.5" x 1.5" x 3", 2 oz. (60mL)



MINF Denibbing Mini-File .79"x1.65" , Fine/Coarse



M-9915G Microfiber Cleaning Cloth 15¾" x 15¾", Grey 2/pack



MPA0465 MR SGV Series Paper Dustbag Insert (10/pack / 9" x 17")



MPA0110 MR SGV Series Cloth Vacuum Bag (1 Pack / 9.25" x 18")



MRP-SGVB PROS SGV Series Fleece Dustbag (3 Pack / 8.5" x 12.5")



BPA10825 Intelligent Battery 10.8V 2.5Ah



BPA10850 Intelligent Battery 10.8V 5.0Ah



MPAD-QD Quick Disconnect Pad Adapter



DE-WSS Work Station Shelf for Dust Extractor



DE-WS Work Station for Dust Extractor



MAI-CART-912 Mirka Smart Cart / Solution Trolley

9190310111 Dust Extractor Trolley



MAI-STOOL-13 Mirka Bulldog Counter Stool, 2-Ring Swivel

Grit Comparison Chart

MICRON	US CAMI	FEPA 'P'	JAPAN JIS
500	36	36	36
430	40		
425		40	
350	50		40
336		50	
300			50
270	60	60	
260			
250			60
210			70
200		80	
192	80		
177			80
162		100	
149			90
140	100		
125		120	100
116	120		
100		150	120
93	150		
82	180	180	150
68	220	220	180
60		240	240
52	240	280	280
46		320	320
42	280		
40		360	360
35	320	400	400
30		500	
28	360		500
26		600	600
22	400	800	700
18	500	1000	800
15	600	1200	1000
13		1500	1200
10		2000	1500
8		2500	2000
7		3000	2500
6			
5		5000	3000
3			4000

Use of Mirka logo by partners

The logo may not be displayed as a primary or prominent feature on any non-Mirka materials.

Companies using the logo pursuant to these guidelines must also display in the primary and more prominent position, their own logo(s), business name, product names, or other branding.


The logo may not be imitated or used as a design feature in any manner.

The logo may not be used in a manner that would disparage Mirka or its products or services.

Neither the logo nor the Mirka name may be used in any other company name, product name, service name, domain name, website title, publication title, social media handle, or the like.

Non-Mirka materials should not mimic any Mirka advertising, product packaging, or website design.

The logo must be used as provided by Mirka with no changes, including but not limited to changes in the color, proportion, or design, or removal of any words or artwork. The logo may not be animated, morphed, or otherwise distorted in perspective or appearance.

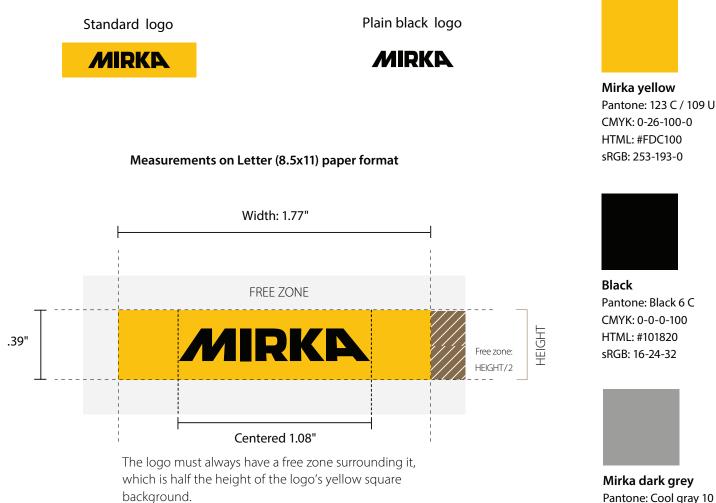

Use the original Mirka logo provided by Mirka CANADA.

Pantone: Cool gray 10 C CMYK: 0-0-0-50 HTML: #9D9D9C sRGB: 157-157-156

Incorrect use of logo

Avoid using yellow backgrounds in marketing materials, but if it for some reason can't be avoided, use a plain black logo version.

In some circumstances you might need to use a negative (white) version of the plain Mirka logo (outlined for visual only).

Authorized logo used as primary logo on website

<u>Authorized partners</u> using the authorized logo as primary logo on their websites, must display information about their own company and clearly mention in text that the company is an Authorized Partner of Mirka.

The logo must be used as provided by Mirka with no changes, including but not limited to changes in the color, proportion, or design, or removal of any words or artwork. The logo may not be animated, morphed, or otherwise distorted in perspective or appearance. Images that are Mirka property shouldn't be changed or manipulated in any manner.

The Mirka name may not be used in any other company name or in the domain name.

The Mirka name may not be used in any social media handle(s).

The logo may not be used in a manner that would disparage Mirka or its products or services.

Placement of Authorized logo


Upper Left Edge

To be used in materials on paper – format Letter (8.5 x 11) and larger. The space between the Mirka logo and the upper edge is always the same as the height of the Mirka logo.

Upper Corner

To be used in materials on paper – 5 x 8 and smaller On small items, such as business cards and smaller ads, the logo should be placed in the *upper* corner.

Measurements on Letter (8.5x11) paper format







MIRKA



NOTES	



Mirka Canada Inc. Tel. +1 855 234 6385 Tel. +1 514 400 3783 custserv.ca@mirka.com



The User is responsible for determining whether the Mirka product is fit for a particular purpose and suitable for the User's application.

The User is also responsible for complying with any applicable safety and health-related regulations and taking any safety and health-related precautions when using Mirka products. This includes, but is not limited to: wearing safety glasses, face masks, gloves, and protective clothing, if necessary; following instructions and warning labels; and operating Mirka products safely including at safe operating speeds.

By User's purchase or use of Mirka products, User acknowledges, represents, and warrants that User will: (a) comply with the foregoing; (b) assume all risks in connection with the use of Mirka products; and (c) read and understand the Mirka Warranty Policy.

Environmental responsibility is a natural part of Mirka's activities and product development. We make sure to take the environment into consideration in all our activities by following the environmental management system ISO 14001 and by offering unique products like our NET sanding discs that allow for a cleaner and therefore healthier work place.



